


YRKK系列绕线转子高压三相异步电动机安装尺寸 (6KV)

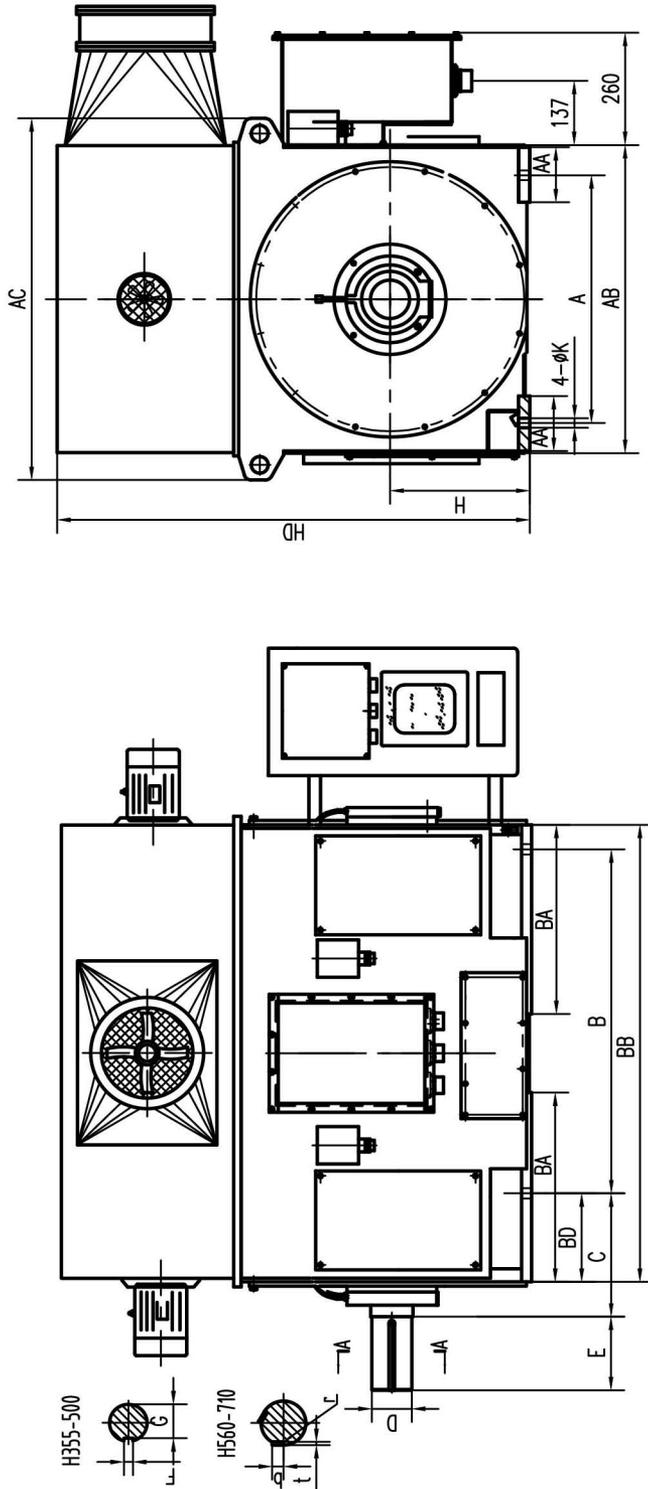

YRKK系列6kV高压三相异步电动机外形尺寸图

机座 极数	安装尺寸及公差										外形尺寸																																				
	A		B		C		D		E		F		G		t		b		r		H		K		AA		AB		BA		BB		BD		HD		L										
	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	最大尺寸	最小尺寸	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差										
355 4	630	±1.4	900	±1.4	315		100		28	0	90											355	+0.52 0	28		800	560	1420	200	1420	2580																
400 4-8	710		1000		335	+0.035 +0.013	110		28	-0.052	100											400			900	1450	1520		1450	2690																	
450 4	800	±1.75	1120	±1.75	355		120				109											450		35	980	1650	1640		1650	2850																	
450 6-12	800						130															450			1120	1640	1640		1650	2890																	
500 4	900		1250		475		140															500	+0.62 0	42	1120	1840	1750	300	1840	3050																	
500 6-12	900						140	+0.04 +0.015	36		128	0 -0.062										500			1120	1840	1750	300	1840	3050																	
560 4	1000	±2.1	1400	±2.1	500		150															560			1440	2080	1880	340	2080	3190																	
560 6-12	1000						150															560			1440	2080	1880	340	2080	3190																	
630 4	1120		1600		530		160															630		48	1360	2250	2020	300	2250	3430																	
630 6-12	1120						170															630			1580	2250	2020	300	2250	3430																	
710 4-12	1400	±2.8	1800	±2.8	530		180															710		56	1600	2900	1850	2170	1850	2900	3740																
710 4-12	1400						200	+0.046 -0.017														710			1820	2900	1850	2170	1850	2900	3740																

YRKK355-710系列高压6kV数据

型号	额定功率 kW	同步转速 r/min	定子电流 A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 $\cos \phi$	
YRKK355-4	185	1500	23.5	91.2	0.83	1.8
YRKK355-4	200	1500	25.4	91.4	0.83	1.8
YRKK355-4	220	1500	27.8	91.6	0.83	1.8
YRKK355-4	250	1500	31.1	92	0.84	1.8
YRKK355-4	280	1500	34.8	92.1	0.84	1.8
YRKK355-4	315	1500	39.1	92.2	0.84	1.8
YRKK400-4	355	1500	44.1	92.3	0.84	1.8
YRKK400-4	400	1500	49.5	92.6	0.84	1.8
YRKK400-4	450	1500	54.9	92.8	0.85	1.8
YRKK400-4	500	1500	60.9	93	0.85	1.8
YRKK400-4	560	1500	67.9	93.3	0.85	1.8
YRKK400-6	200	1000	25.7	91.3	0.82	1.8
YRKK400-6	220	1000	28.2	91.5	0.82	1.8
YRKK400-6	250	1000	32.0	91.8	0.82	1.8
YRKK400-6	280	1000	35.8	91.9	0.82	1.8
YRKK400-6	315	1000	39.7	92.1	0.83	1.8
YRKK400-6	355	1000	44.6	92.3	0.83	1.8
YRKK400-6	400	1000	50.0	92.7	0.83	1.8
YRKK400-8	200	750	27.1	91.2	0.78	1.8
YRKK400-8	220	750	29.3	91.4	0.79	1.8
YRKK400-8	250	750	33.2	91.6	0.79	1.8
YRKK400-8	280	750	37.2	91.8	0.79	1.8
YRKK450-4	630	1500	76.2	93.6	0.85	1.8
YRKK450-4	710	1500	84.7	93.8	0.86	1.8
YRKK450-4	800	1500	95.3	93.9	0.86	1.8
YRKK450-4	900	1500	107.1	94	0.86	1.8
YRKK450-6	450	1000	56.2	92.8	0.83	1.8
YRKK450-6	500	1000	61.6	93	0.84	1.8
YRKK450-6	560	1000	68.8	93.2	0.84	1.8
YRKK450-6	630	1000	77.2	93.5	0.84	1.8
YRKK450-8	315	750	41.8	91.9	0.79	1.8
YRKK450-8	355	750	46.4	92	0.8	1.8
YRKK450-8	400	750	52.1	92.4	0.8	1.8
YRKK450-8	450	750	58.5	92.5	0.8	1.8
YRKK450-10	200	600	28.4	90.3	0.75	1.8
YRKK450-10	220	600	31.2	90.5	0.75	1.8


YRKK355-1000系列高压6kV数据

型号	额定功率 kW	同步转速 r/min	定子电流 A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 cos φ	
YRKK450-10	250	600	35.3	90.8	0.75	1.8
YRKK450-10	280	600	38.9	91.1	0.76	1.8
YRKK450-10	315	600	43.7	91.2	0.76	1.8
YRKK450-10	355	600	49.2	91.4	0.76	1.8
YRKK450-12	200	500	30.5	90	0.7	1.8
YRKK450-12	220	500	32.6	90.3	0.72	1.8
YRKK450-12	250	500	36.9	90.6	0.72	1.8
YRKK500-4	1000	1500	118.9	94.1	0.86	1.8
YRKK500-4	1120	1500	131.4	94.3	0.87	1.8
YRKK500-4	1250	1500	146.5	94.4	0.87	1.8
YRKK500-4	1400	1500	163.9	94.5	0.87	1.8
YRKK500-6	710	1000	86.7	93.8	0.84	1.8
YRKK500-6	800	1000	96.3	94	0.85	1.8
YRKK500-6	900	1000	108.3	94.1	0.85	1.8
YRKK500-6	1000	1000	120.1	94.3	0.85	1.8
YRKK500-8	500	750	64.7	92.9	0.8	1.8
YRKK500-8	560	750	71.5	93.1	0.81	1.8
YRKK500-8	630	750	80.2	93.3	0.81	1.8
YRKK500-8	710	750	90.2	93.5	0.81	1.8
YRKK500-10	400	600	54.9	92.2	0.76	1.8
YRKK500-10	450	600	60.8	92.5	0.77	1.8
YRKK500-10	500	600	67.4	92.7	0.77	1.8
YRKK500-10	560	600	75.3	92.9	0.77	1.8
YRKK500-10	630	600	84.7	93	0.77	1.8
YRKK500-12	280	500	41.1	91	0.72	1.8
YRKK500-12	315	500	46.1	91.3	0.72	1.8
YRKK500-12	355	500	51.2	91.4	0.73	1.8
YRKK500-12	400	500	57.5	91.7	0.73	1.8
YRKK500-12	450	500	64.5	91.9	0.73	1.8
YRKK560-4	1600	1500	187.1	94.6	0.87	1.8
YRKK560-4	1800	1500	210.2	94.7	0.87	1.8
YRKK560-4	2000	1500	233.1	94.9	0.87	1.8
YRKK560-6	1120	1000	134.2	94.5	0.85	1.8
YRKK560-6	1250	1000	149.6	94.6	0.85	1.8
YRKK560-6	1400	1000	167.4	94.7	0.85	1.8
YRKK560-8	800	750	101.4	93.7	0.81	1.8

YRKK355-710系列高压6kV数据

型号	额定功率 kW	同步转速 r/min	定子电流 A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 $\cos \phi$	
YRKK560-8	900	750	114.0	93.8	0.81	1.8
YRKK560-8	1000	750	126.5	93.9	0.81	1.8
YRKK560-8	1120	750	141.4	94.1	0.81	1.8
YRKK560-10	710	600	94.0	93.2	0.78	1.8
YRKK560-10	800	600	105.8	93.3	0.78	1.8
YRKK560-10	900	600	118.9	93.4	0.78	1.8
YRKK560-10	1000	600	131.8	93.6	0.78	1.8
YRKK560-12	500	500	69.7	92.1	0.75	1.8
YRKK560-12	560	500	77.9	92.2	0.75	1.8
YRKK560-12	630	500	87.6	92.3	0.75	1.8
YRKK560-12	710	500	98.5	92.5	0.75	1.8
YRKK630-4	2240	1500	260.8	95	0.87	1.8
YRKK630-4	2500	1500	290.8	95.1	0.87	1.8
YRKK630-4	2800	1500	325.3	95.2	0.87	1.8
YRKK630-6	1600	1000	191.1	94.8	0.85	1.8
YRKK630-6	1800	1000	214.7	94.9	0.85	1.8
YRKK630-6	2000	1000	238.3	95	0.85	1.8
YRKK630-8	1250	750	157.6	94.2	0.81	1.8
YRKK630-8	1400	750	176.4	94.3	0.81	1.8
YRKK630-8	1600	750	201.4	94.4	0.81	1.8
YRKK630-10	1120	600	148.3	93.2	0.78	1.8
YRKK630-10	1250	600	165.3	93.3	0.78	1.8
YRKK630-10	1400	600	184.9	93.4	0.78	1.8
YRKK630-12	800	500	110.8	92.6	0.75	1.8
YRKK630-12	900	500	124.4	92.8	0.75	1.8
YRKK630-12	1000	500	138.1	92.9	0.75	1.8
YRKK710-4	3150	1500	365.6	95.3	0.87	1.8
YRKK710-4	3550	1500	411.6	95.4	0.87	1.8
YRKK710-6	2240	1000	267.5	94.8	0.85	1.8
YRKK710-6	2500	1000	298.2	94.9	0.85	1.8
YRKK710-8	1800	750	224.2	94.2	0.82	1.8
YRKK710-8	2000	750	248.9	94.3	0.82	1.8
YRKK710-10	1600	600	208.2	93.6	0.79	1.8
YRKK710-12	1000	500	136.7	92.6	0.76	1.8
YRKK710-12	1120	500	153.0	92.7	0.76	1.8
YRKK710-12	1250	500	170.4	92.9	0.76	1.8

YRKK系列绕线转子高压三相异步电动机安装尺寸 (10KV)

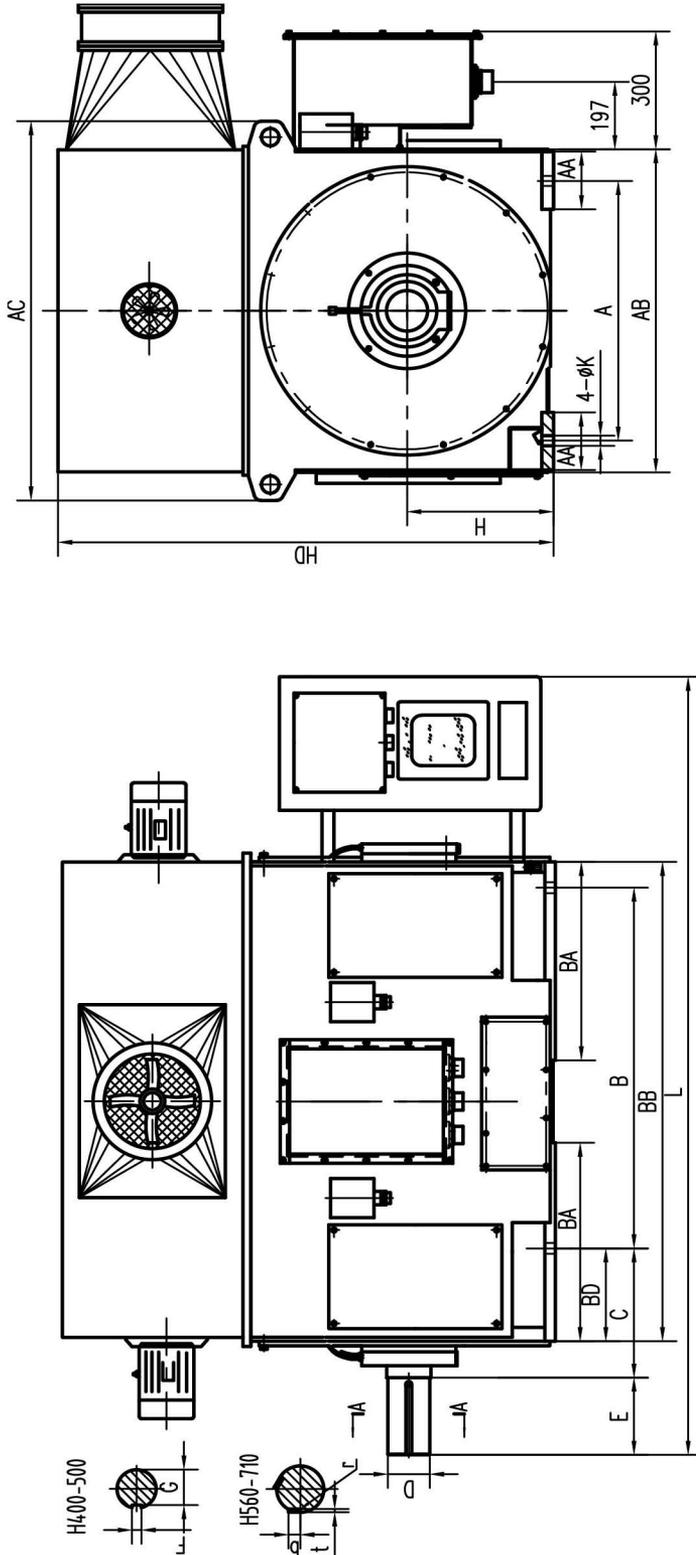

YRKK系列10kV高压三相异步电动机外形尺寸图

机座	极数	安装尺寸及公差										外形尺寸																											
		A		B		C		D		E		F		G		t		b		r		H		K		AA		AC		AB		BA		BB		BD		HD	
基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差		
400	4-8	710	±1.75	1000	±1.75	335		110	+0.035	210		28	0	100	0							400		35		150	1124	900	610	1520	610	1520	230	1450	2810	2810	2850	3000	
450	4-8	800		1120		355		130	+0.013			32	-0.052	119	-0.2							450		42		1204	980	680	1640		1750	300	1840	3000	3000	3190	3190	3240	3430
500	4	900		1250		475		150	+0.04	250			0								500		48		1344	1120	720		1880	340	2080	1880	340	2080	3190	3190	3240	3430	3430
560	4	1000	±2.1	1400	±2.1	500	±4	160	+0.015			32	-0.062								560		56		1440	1220		1880	340	2080	1880	340	2080	3190	3190	3240	3430	3430	
630	4	1120		1600		530		170		300	±0.65										630		48		1580	1360	780	2020	300	2250	300	2250	300	2250	3430	3430	3430	3430	3430
710	4-12	1400	±2.8	1800	±2.8	530		180	+0.046	350	±0.7										710		56		1820	1600	850	2170	185	2900	185	2900	3430	3430	3430	3430	3430	3430	

YRKK400-710系列高压10KV数据

型号	额定功率 kW	同步转速 r/min	定子电流 A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 $\cos \phi$	
YRKK400-4	200	1500	15.5	92.10	0.81	1.8
YRKK400-4	220	1500	17.0	92.20	0.81	1.8
YRKK400-4	250	1500	19.1	92.30	0.82	1.8
YRKK400-4	280	1500	21.3	92.60	0.82	1.8
YRKK400-4	315	1500	23.6	92.90	0.83	1.8
YRKK400-4	355	1500	26.5	93.10	0.83	1.8
YRKK400-6	200	1000	16.1	91.90	0.78	1.8
YRKK400-6	220	1000	17.5	92.00	0.79	1.8
YRKK400-6	250	1000	19.8	92.20	0.79	1.8
YRKK450-4	400	1500	29.8	93.40	0.83	1.8
YRKK450-4	450	1500	33.4	93.60	0.83	1.8
YRKK450-4	500	1500	37.0	94.00	0.83	1.8
YRKK450-4	560	1500	41.3	94.40	0.83	1.8
YRKK450-6	280	1000	22.1	92.40	0.79	1.8
YRKK450-6	315	1000	24.9	92.60	0.79	1.8
YRKK450-6	355	1000	27.9	92.90	0.79	1.8
YRKK450-6	400	1000	31.4	93.20	0.79	1.8
YRKK450-8	200	750	17.2	91.90	0.73	1.8
YRKK450-8	220	750	18.9	92.00	0.73	1.8
YRKK450-8	250	750	21.5	92.10	0.73	1.8
YRKK500-4	630	1500	45.8	94.50	0.84	1.8
YRKK500-4	710	1500	51.6	94.60	0.84	1.8
YRKK500-4	800	1500	58.1	94.70	0.84	1.8
YRKK500-4	900	1500	64.4	94.90	0.85	1.8
YRKK500-4	1000	1500	71.5	95.00	0.85	1.8
YRKK500-6	450	1000	35.2	93.40	0.79	1.8
YRKK500-6	500	1000	38.6	93.60	0.80	1.8
YRKK500-6	560	1000	43.1	93.80	0.80	1.8
YRKK500-6	630	1000	47.1	94.10	0.82	1.8
YRKK500-6	710	1000	53.0	94.30	0.82	1.8


YRKK400-710系列高压10KV数据

型号	额定功率 kW	同步转速 r/min	定子电流 A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 $\cos \phi$	
YRKK500-8	280	750	24.0	92.30	0.73	1.8
YRKK500-8	315	750	26.9	92.60	0.73	1.8
YRKK500-8	355	750	29.4	92.90	0.75	1.8
YRKK500-8	400	750	33.1	93.10	0.75	1.8
YRKK500-8	450	750	36.1	93.40	0.77	1.8
YRKK500-8	500	750	40.1	93.60	0.77	1.8
YRKK500-10	200	600	18.1	91.20	0.70	1.8
YRKK500-10	220	600	19.8	91.50	0.70	1.8
YRKK500-10	250	600	22.4	91.90	0.70	1.8
YRKK500-10	280	600	25.1	92.00	0.70	1.8
YRKK500-10	315	600	28.2	92.20	0.70	1.8
YRKK500-10	355	600	31.7	92.30	0.70	1.8
YRKK500-12	200	500	18.1	91.10	0.70	1.8
YRKK500-12	220	500	19.9	91.20	0.70	1.8
YRKK500-12	250	500	22.6	91.30	0.70	1.8
YRKK560-4	1120	1500	80.0	95.10	0.85	1.8
YRKK560-4	1250	1500	88.2	95.20	0.86	1.8
YRKK560-4	1400	1500	98.6	95.30	0.86	1.8
YRKK560-6	800	1000	58.9	94.50	0.83	1.8
YRKK560-6	900	1000	66.1	94.70	0.83	1.8
YRKK560-6	1000	1000	73.3	94.90	0.83	1.8
YRKK560-6	1120	1000	81.9	95.10	0.83	1.8
YRKK560-8	560	750	44.8	93.80	0.77	1.8
YRKK560-8	630	750	50.3	94.00	0.77	1.8
YRKK560-8	710	750	56.5	94.20	0.77	1.8
YRKK560-8	800	750	63.5	94.40	0.77	1.8
YRKK560-10	400	600	34.6	92.80	0.72	1.8
YRKK560-10	450	600	38.8	93.00	0.72	1.8
YRKK560-10	500	600	43.0	93.20	0.72	1.8
YRKK560-10	560	600	48.0	93.50	0.72	1.8

YRKK400-710系列高压10KV数据

型号	额定功率 kW	同步转速 r/min	定子电流 A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 $\cos \phi$	
YRKK560-10	630	600	54.0	93.60	0.72	1.8
YRKK560-12	280	500	25.3	91.40	0.70	1.8
YRKK560-12	315	500	28.4	91.60	0.70	1.8
YRKK560-12	355	500	31.8	92.00	0.70	1.8
YRKK560-12	400	500	36.0	91.60	0.70	1.8
YRKK560-12	450	500	40.3	92.00	0.70	1.8
YRKK630-4	1600	1500	112.6	95.40	0.86	1.8
YRKK630-4	1800	1500	126.5	95.50	0.86	1.8
YRKK630-4	2000	1500	140.5	95.60	0.86	1.8
YRKK630-6	1250	1000	91.3	95.20	0.83	1.8
YRKK630-6	1400	1000	102.2	95.30	0.83	1.8
YRKK630-6	1600	1000	116.7	95.40	0.83	1.8
YRKK630-8	900	750	68.7	94.60	0.80	1.8
YRKK630-8	1000	750	76.2	94.70	0.80	1.8
YRKK630-8	1120	750	85.3	94.80	0.80	1.8
YRKK630-8	1250	750	95.1	94.90	0.80	1.8
YRKK630-10	710	600	57.6	93.70	0.76	1.8
YRKK630-10	800	600	64.7	93.90	0.76	1.8
YRKK630-10	900	600	72.7	94.00	0.76	1.8
YRKK630-10	1000	600	80.7	94.10	0.76	1.8
YRKK630-12	500	500	43.2	92.90	0.72	1.8
YRKK630-12	560	500	48.2	93.20	0.72	1.8
YRKK630-12	630	500	54.1	93.30	0.72	1.8
YRKK630-12	710	500	61.0	93.40	0.72	1.8
YRKK710-4	2240	1500	157.1	95.70	0.86	1.8
YRKK710-4	2500	1500	175.2	95.80	0.86	1.8
YRKK710-4	2800	1500	196.0	95.90	0.86	1.8
YRKK710-4	3150	1500	220.3	96.00	0.86	1.8
YRKK710-6	1800	1000	131.4	95.30	0.83	1.8
YRKK710-6	2000	1000	145.8	95.40	0.83	1.8
YRKK710-6	2240	1000	163.2	95.50	0.83	1.8

YRKK系列绕线转子高压三相异步电动机安装尺寸 (800-1000)

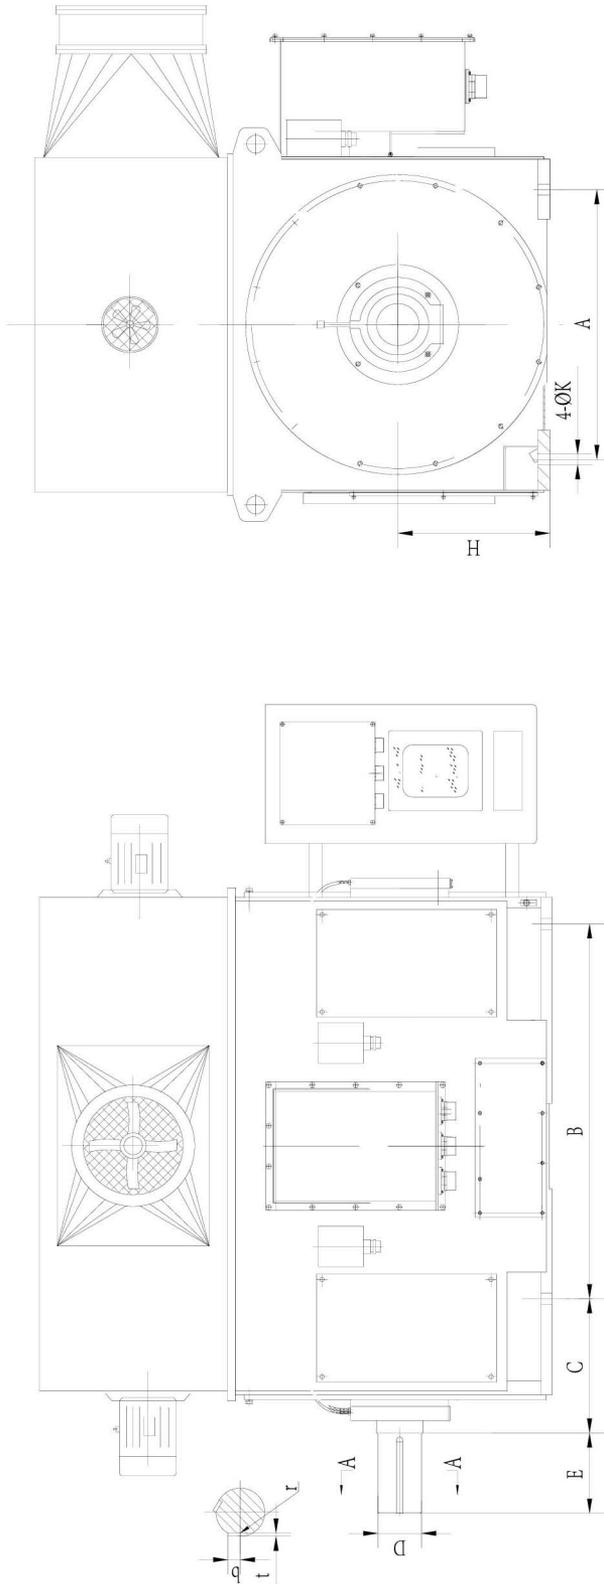

YRKK系列大型高压三相异步电动机外形图及安装尺寸 (6000V/10000V)

安装尺寸及公差

机座	极数	A		B		C		D		E		t		b		r		H		K	
		基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	最小尺寸	最大尺寸	基本尺寸	极限偏差	基本尺寸	极限偏差
800	4-12	1600	±2.8	2000	±2.8	530		220	+0.046	350	±0.70	16		57.1		1.2	1.6	800		56	+0.62
		1800		2240		600	±4.2	250	+0.017	410		18	+0.3	64.6		1.6		900	0	66	-1.5
1000	4-12	2000	±3.5	2500	±3.5			280	+0.052	470	±0.77	20		72.1		2	2.5	1000			
									+0.020												

注：样本数据供需方参考，订货时以供方提供外形图为准，如有变动供方恕不通知。

YRKK800-1000系列高压6kV数据

型号	额定功率 kW	同步转速 r/min	定子电流 A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 cos φ	
YRKK800-4	4000	1500	463.3	95.5	0.87	1.8
YRKK800-4	4500	1500	520.6	95.6	0.87	1.8
YRKK800-4	5000	1500	577.9	95.7	0.87	1.8
YRKK800-6	2800	1000	328.8	95.3	0.86	1.8
YRKK800-6	3150	1000	369.5	95.4	0.86	1.8
YRKK800-6	3550	1000	415.9	95.5	0.86	1.8
YRKK800-6	4000	1000	468.2	95.6	0.86	1.8
YRKK800-8	2240	750	274.8	94.5	0.83	1.8
YRKK800-8	2500	750	306.4	94.6	0.83	1.8
YRKK800-8	2800	750	342.8	94.7	0.83	1.8
YRKK800-10	1800	600	230.3	94	0.8	1.8
YRKK800-10	2000	600	255.7	94.1	0.8	1.8
YRKK800-10	2240	600	286.0	94.2	0.8	1.8
YRKK800-12	1400	500	187.9	93.1	0.77	1.8
YRKK800-12	1600	500	214.5	93.2	0.77	1.8
YRKK800-12	1800	500	241.1	93.3	0.77	1.8
YRKK800-12	2000	500	267.6	93.4	0.77	1.8
YRKK900-8	3150	750	380.6	94.8	0.84	1.8
YRKK900-8	3550	750	429.0	94.8	0.84	1.8
YRKK900-8	4000	750	482.9	94.9	0.84	1.8
YRKK900-10	2500	600	315.0	94.3	0.81	1.8
YRKK900-10	2800	600	352.0	94.5	0.81	1.8
YRKK900-10	3150	600	395.6	94.6	0.81	1.8
YRKK900-10	3550	600	445.3	94.7	0.81	1.8
YRKK900-12	2240	500	295.6	93.5	0.78	1.8
YRKK900-12	2500	500	329.5	93.6	0.78	1.8
YRKK900-12	2800	500	368.7	93.7	0.78	1.8
YRKK1000-10	4000	600	495.7	94.7	0.82	1.8
YRKK1000-10	4500	600	557.6	94.7	0.82	1.8
YRKK1000-10	5000	600	618.9	94.8	0.82	1.8
YRKK1000-12	3150	500	409.1	93.8	0.79	1.8
YRKK1000-12	3550	500	460.5	93.9	0.79	1.8
YRKK1000-12	4000	500	518.3	94	0.79	1.8
YRKK1000-12	4500	500	582.5	94.1	0.79	1.8

YRKK800-1000系列高压10kV数据

型号	额定功率 kW	同步转速 r/min	定子电流 A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 cos ϕ	
YRKK800-4	3550	1500	248.3	96.00	0.86	1.8
YRKK800-4	4000	1500	279.4	96.10	0.86	1.8
YRKK800-4	4500	1500	314.0	96.20	0.86	1.8
YRKK800-4	5000	1500	348.6	96.30	0.86	1.8
YRKK800-6	2500	1000	182.1	95.50	0.83	1.8
YRKK800-6	2800	1000	203.7	95.60	0.83	1.8
YRKK800-6	3150	1000	229.0	95.70	0.83	1.8
YRKK800-8	2240	750	167.9	95.10	0.81	1.8
YRKK800-8	2500	750	187.4	95.10	0.81	1.8
YRKK900-6	3550	1000	258.0	95.70	0.83	1.8
YRKK900-6	4000	1000	290.4	95.80	0.83	1.8
YRKK900-6	4500	1000	326.4	95.90	0.83	1.8
YRKK900-8	2800	750	209.4	95.30	0.81	1.8
YRKK900-8	3150	750	235.6	95.30	0.81	1.8
YRKK900-10	2240	600	177.5	94.60	0.77	1.8
YRKK900-10	2500	600	198.2	94.60	0.77	1.8
YRKK1000-8	3550	750	262.0	95.40	0.82	1.8
YRKK1000-8	4000	750	294.9	95.50	0.82	1.8
YRKK1000-8	4500	750	331.4	95.60	0.82	1.8
YRKK1000-10	2800	600	221.5	94.80	0.77	1.8
YRKK1000-10	3150	600	248.9	94.90	0.77	1.8
YRKK1000-12	2240	500	185.1	94.40	0.74	1.8
YRKK1000-12	2500	500	206.4	94.50	0.74	1.8
YRKK1000-12	2800	500	230.9	94.60	0.74	1.8
YRKK1000-12	3150	500	259.5	94.70	0.74	1.8