
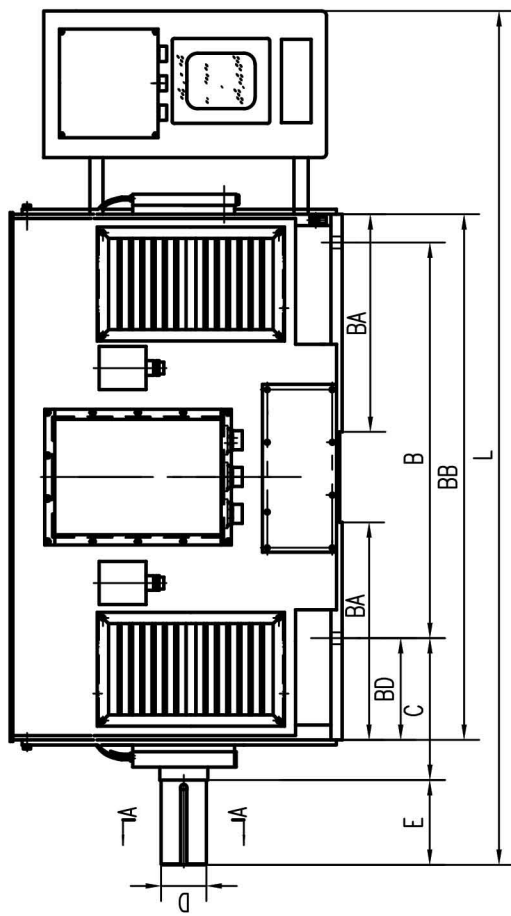




机座		安装尺寸及公差										外形尺寸																					
		A		B		C		D		E		F		G		t		b		r		H		K		AA	AC	AB	BA	BB	BD	HD	L
		基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差								
355	4	630	±1.4	900	±1.4	315		100	+0.035			28	0	90										28	+0.52 0	1024	800	560	1420	200	860	2580	
	400	4-8	710		1000		110	+0.013	210			-0.052	100	0												1124	900	610	1520		880	2690	
	4		800	±1.75	1120	355		120						109	-0.2								35				1204	980	680	1640	230	980	2850
	4	6-12						130		±0.57			32	0	119																	2890	
500	4	900		1250		475	±4.0	140		250			-0.062	128	0																		
	6-12							150	+0.040						-0.3								42	+0.62 0	1344	1120			1750	300	1080	3050	
	4		1000	±2.1	1400	500		160																									
	6-12							170																									
630	4			1600				180		300																							
	6-12									±0.65																							
	4																																
	6-12																																
710	4-16		±2.8	1800	±2.8			200	+0.046 +0.017	350	±0.70																						
	4																																
	6-12																																
	4																																

注：样本数据供需方参考，订货时以供方提供外形图为准，如有变动供方恕不通知。

注：样本数据供需方参考，订货时以供方提供外形图为准，如有变动供方恕不通知。

YR355-710系列高压6kV数据

型号	额定功率 kW	同步转速 r/min	定子电流A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 $\cos \phi$	
YR355-4	220	1500	27.8	91.9	0.83	1.8
YR355-4	250	1500	31.1	92.2	0.84	1.8
YR355-4	280	1500	34.8	92.3	0.84	1.8
YR355-4	315	1500	38.6	92.5	0.85	1.8
YR355-4	355	1500	43.4	92.6	0.85	1.8
YR400-4	400	1500	48.8	92.8	0.85	1.8
YR400-4	450	1500	54.8	93.0	0.85	1.8
YR400-4	500	1500	60.7	93.3	0.85	1.8
YR400-4	560	1500	67.7	93.6	0.85	1.8
YR400-4	630	1500	75.1	93.9	0.86	1.8
YR400-6	220	1000	28.5	91.7	0.81	1.8
YR400-6	250	1000	31.9	91.9	0.82	1.8
YR400-6	280	1000	35.7	92.0	0.82	1.8
YR400-6	315	1000	40.0	92.3	0.82	1.8
YR400-6	355	1000	45.0	92.5	0.82	1.8
YR400-6	400	1000	50.0	92.8	0.83	1.8
YR400-6	450	1000	55.5	92.9	0.84	1.8
YR400-8	220	750	29.7	91.4	0.78	1.8
YR400-8	250	750	33.7	91.5	0.78	1.8
YR400-8	280	750	37.2	91.7	0.79	1.8
YR400-8	315	750	41.2	91.9	0.80	1.8
YR450-4	710	1500	84.5	94.0	0.86	1.8
YR450-4	800	1500	93.9	94.2	0.87	1.8
YR450-4	900	1500	105.6	94.3	0.87	1.8
YR450-4	1000	1500	117.2	94.4	0.87	1.8
YR450-6	500	1000	61.5	93.2	0.84	1.8
YR450-6	560	1000	68.7	93.4	0.84	1.8
YR450-6	630	1000	76.1	93.7	0.85	1.8
YR450-6	710	1000	85.6	93.9	0.85	1.8
YR450-8	355	750	46.4	92.0	0.80	1.8
YR450-8	400	750	52.1	92.3	0.80	1.8
YR450-8	450	750	57.8	92.5	0.81	1.8
YR450-8	500	750	63.9	92.9	0.81	1.8
YR450-10	220	600	30.4	90.5	0.77	1.8
YR450-10	250	600	34.4	90.8	0.77	1.8
YR450-10	280	600	38.0	91.0	0.78	1.8
YR450-10	315	600	42.6	91.2	0.78	1.8

YR355-710系列高压6kV数据

型号	额定功率 kW	同步转速 r/min	定子电流A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 $\cos \phi$	
YR450-10	355	600	47.9	91.4	0.78	1.8
YR450-10	400	600	53.6	92.1	0.78	1.8
YR450-12	220	500	32.8	89.6	0.72	1.8
YR450-12	250	500	36.8	90.7	0.72	1.8
YR450-12	280	500	40.6	90.9	0.73	1.8
YR500-4	1120	1500	131.1	94.5	0.87	1.8
YR500-4	1250	1500	146.0	94.7	0.87	1.8
YR500-4	1400	1500	163.3	94.8	0.87	1.8
YR500-4	1600	1500	186.5	94.9	0.87	1.8
YR500-6	800	1000	96.1	94.2	0.85	1.8
YR500-6	900	1000	108.0	94.3	0.85	1.8
YR500-6	1000	1000	119.8	94.5	0.85	1.8
YR500-6	1120	1000	134.0	94.6	0.85	1.8
YR500-8	560	750	71.5	93.1	0.81	1.8
YR500-8	630	750	80.2	93.3	0.81	1.8
YR500-8	710	750	90.3	93.4	0.81	1.8
YR500-8	800	750	101.4	93.7	0.81	1.8
YR500-10	450	600	60.1	92.4	0.78	1.8
YR500-10	500	600	65.7	92.7	0.79	1.8
YR500-10	560	600	73.4	92.9	0.79	1.8
YR500-10	630	600	81.5	93.0	0.80	1.8
YR500-10	710	600	91.7	93.1	0.80	1.8
YR500-12	315	500	44.9	91.3	0.74	1.8
YR500-12	355	500	49.8	91.4	0.75	1.8
YR500-12	400	500	56.0	91.6	0.75	1.8
YR500-12	450	500	61.3	91.8	0.77	1.8
YR500-12	500	500	67.8	92.1	0.77	1.8
YR560-4	1800	1500	209.6	95.0	0.87	1.8
YR560-4	2000	1500	232.4	95.2	0.87	1.8
YR560-4	2240	1500	260.0	95.3	0.87	1.8
YR560-6	1250	1000	149.3	94.8	0.85	1.8
YR560-6	1400	1000	167.0	94.9	0.85	1.8
YR560-6	1600	1000	190.7	95.0	0.85	1.8
YR560-8	900	750	114.0	93.8	0.81	1.8
YR560-8	1000	750	126.5	93.9	0.81	1.8
YR560-8	1120	750	141.5	94.0	0.81	1.8

YR355-710系列高压6kV数据

型号	额定功率 kW	同步转速 r/min	定子电流A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 $\cos \phi$	
YR560-8	1250	750	157.6	94.2	0.81	1.8
YR560-10	800	600	103.1	93.3	0.80	1.8
YR560-10	900	600	115.9	93.4	0.80	1.8
YR560-10	1000	600	128.5	93.6	0.80	1.8
YR560-10	1120	600	143.8	93.7	0.80	1.8
YR560-12	560	500	75.9	92.2	0.77	1.8
YR560-12	630	500	85.3	92.3	0.77	1.8
YR560-12	710	500	96.0	92.4	0.77	1.8
YR560-12	800	500	108.0	92.6	0.77	1.8
YR630-4	2500	1500	289.8	95.4	0.87	1.8
YR630-4	2800	1500	324.3	95.5	0.87	1.8
YR630-4	3150	1500	364.1	95.7	0.87	1.8
YR630-6	1800	1000	214.3	95.1	0.85	1.8
YR630-6	2000	1000	237.6	95.3	0.85	1.8
YR630-6	2240	1000	265.8	95.4	0.85	1.8
YR630-8	1400	750	176.4	94.3	0.81	1.8
YR630-8	1600	750	201.4	94.4	0.81	1.8
YR630-8	1800	750	226.3	94.5	0.81	1.8
YR630-10	1250	600	160.1	93.9	0.80	1.8
YR630-10	1400	600	179.1	94.0	0.80	1.8
YR630-10	1600	600	204.5	94.1	0.80	1.8
YR630-12	900	500	121.3	92.7	0.77	1.8
YR630-12	1000	500	134.7	92.8	0.77	1.8
YR630-12	1120	500	150.7	92.9	0.77	1.8
YR710-4	3550	1500	409.0	96.0	0.87	1.8
YR710-4	4000	1500	460.4	96.1	0.87	1.8
YR710-6	2500	1000	295.7	95.7	0.85	1.8
YR710-6	2800	1000	331.2	95.7	0.85	1.8
YR710-8	2000	750	243.8	95.1	0.83	1.8
YR710-8	2240	750	272.8	95.2	0.83	1.8
YR710-10	1800	600	226.0	94.6	0.81	1.8
YR710-12	1250	500	164.2	93.9	0.78	1.8
YR710-12	1400	500	183.7	94.0	0.78	1.8
YR710-16	630	375	91.2	92.3	0.72	1.8
YR710-16	710	375	102.5	92.6	0.72	1.8
YR710-16	800	375	115.3	92.7	0.72	1.8
YR710-16	900	375	129.6	92.8	0.72	1.8

YR400-710系列高压10kV数据

型号	额定功率 kW	同步转速 r/min	定子电流 A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 $\cos \phi$	
YR400-4	220	1500	17.1	90.8	0.82	1.8
YR400-4	250	1500	19.1	91.1	0.83	1.8
YR400-4	280	1500	21.3	91.4	0.83	1.8
YR400-4	315	1500	23.6	91.7	0.84	1.8
YR400-4	355	1500	26.5	92.1	0.84	1.8
YR400-4	400	1500	29.4	92.4	0.85	1.8
YR400-6	220	1000	17.7	90.7	0.79	1.8
YR400-6	250	1000	19.8	91.0	0.80	1.8
YR400-6	280	1000	21.8	91.4	0.81	1.8
YR450-4	450	1500	33.0	92.6	0.85	1.8
YR450-4	500	1500	36.6	92.9	0.85	1.8
YR450-4	560	1500	40.8	93.2	0.85	1.8
YR450-4	630	1500	45.7	93.6	0.85	1.8
YR450-6	315	1000	24.5	91.6	0.81	1.8
YR450-6	355	1000	27.5	91.9	0.81	1.8
YR450-6	400	1000	31.0	92.1	0.81	1.8
YR450-6	450	1000	34.7	92.4	0.81	1.8
YR450-8	220	750	19.5	90.6	0.72	1.8
YR450-8	250	750	21.8	90.9	0.73	1.8
YR450-8	280	750	23.6	91.4	0.75	1.8
YR500-4	710	1500	51.3	94.0	0.85	1.8
YR500-4	800	1500	57.0	94.2	0.86	1.8
YR500-4	900	1500	64.1	94.3	0.86	1.8
YR500-4	1000	1500	71.1	94.4	0.86	1.8
YR500-4	1120	1500	78.6	94.6	0.87	1.8
YR500-6	500	1000	38.4	92.7	0.81	1.8
YR500-6	560	1000	42.9	93.0	0.81	1.8
YR500-6	630	1000	47.6	93.2	0.82	1.8
YR500-6	710	1000	53.5	93.4	0.82	1.8
YR500-6	800	1000	58.6	93.8	0.84	1.8
YR500-8	315	750	26.5	91.5	0.75	1.8


YR400-710系列高压10kV数据

型号	额定功率 kW	同步转速 r/min	定子电流 A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 $\cos \phi$	
YR500-8	355	750	29.8	91.8	0.75	1.8
YR500-8	400	750	33.4	92.1	0.75	1.8
YR500-8	450	750	36.5	92.4	0.77	1.8
YR500-8	500	750	40.5	92.6	0.77	1.8
YR500-8	560	750	44.0	93.0	0.79	1.8
YR500-10	220	600	19.8	90.3	0.71	1.8
YR500-10	250	600	22.1	90.6	0.72	1.8
YR500-10	280	600	24.7	90.9	0.72	1.8
YR500-10	315	600	27.7	91.3	0.72	1.8
YR500-10	355	600	31.1	91.5	0.72	1.8
YR500-10	400	600	34.0	91.7	0.74	1.8
YR500-12	220	500	20.1	90.2	0.70	1.8
YR500-12	250	500	22.8	90.6	0.70	1.8
YR500-12	280	500	24.8	90.6	0.72	1.8
YR560-4	1250	1500	87.5	94.8	0.87	1.8
YR560-4	1400	1500	97.9	94.9	0.87	1.8
YR560-4	1600	1500	110.5	95.0	0.88	1.8
YR560-6	900	1000	65.8	94.0	0.84	1.8
YR560-6	1000	1000	72.1	94.2	0.85	1.8
YR560-6	1120	1000	80.6	94.4	0.85	1.8
YR560-6	1250	1000	89.7	94.7	0.85	1.8
YR560-8	630	750	49.4	93.2	0.79	1.8
YR560-8	710	750	55.6	93.4	0.79	1.8
YR560-8	800	750	62.4	93.7	0.79	1.8
YR560-8	900	750	67.5	93.9	0.82	1.8
YR560-10	450	600	37.6	92.1	0.75	1.8
YR560-10	500	600	41.7	92.3	0.75	1.8
YR560-10	560	600	45.9	92.6	0.76	1.8
YR560-10	630	600	51.6	92.8	0.76	1.8
YR560-10	710	600	56.5	93.1	0.78	1.8
YR560-12	315	500	27.8	90.7	0.72	1.8

YR400-710系列高压10kV数据

型号	额定功率 kW	同步转速 r/min	定子电流 A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 $\cos \phi$	
YR560-12	355	500	31.3	90.9	0.72	1.8
YR560-12	400	500	35.2	91.1	0.72	1.8
YR560-12	450	500	39.4	91.5	0.72	1.8
YR560-12	500	500	43.1	91.7	0.73	1.8
YR630-4	1800	1500	124.2	95.1	0.88	1.8
YR630-4	2000	1500	137.7	95.3	0.88	1.8
YR630-4	2240	1500	154.2	95.3	0.88	1.8
YR630-6	1400	1000	100.2	94.9	0.85	1.8
YR630-6	1600	1000	114.4	95.0	0.85	1.8
YR630-6	1800	1000	128.7	95.0	0.85	1.8
YR630-8	1000	750	74.8	94.1	0.82	1.8
YR630-8	1120	750	83.6	94.3	0.82	1.8
YR630-8	1250	750	93.2	94.4	0.82	1.8
YR630-8	1400	750	104.4	94.4	0.82	1.8
YR630-10	800	600	63.5	93.3	0.78	1.8
YR630-10	900	600	71.3	93.4	0.78	1.8
YR630-10	1000	600	79.1	93.6	0.78	1.8
YR630-10	1120	600	88.5	93.7	0.78	1.8
YR630-12	560	500	47.4	92.2	0.74	1.8
YR630-12	630	500	53.1	92.5	0.74	1.8
YR630-12	710	500	59.7	92.8	0.74	1.8
YR630-12	800	500	67.2	92.9	0.74	1.8
YR710-4	2500	1500	177.6	95.6	0.85	1.8
YR710-4	2800	1500	198.9	95.6	0.85	1.8
YR710-4	3150	1500	223.6	95.7	0.85	1.8
YR710-4	3550	1500	251.7	95.8	0.85	1.8
YR710-6	2000	1000	145.8	95.4	0.83	1.8
YR710-6	2240	1000	163.3	95.4	0.83	1.8
YR710-6	2500	1000	182.1	95.5	0.83	1.8

YR系列绕线转子高压三相异步电动机安装尺寸（800-1000）

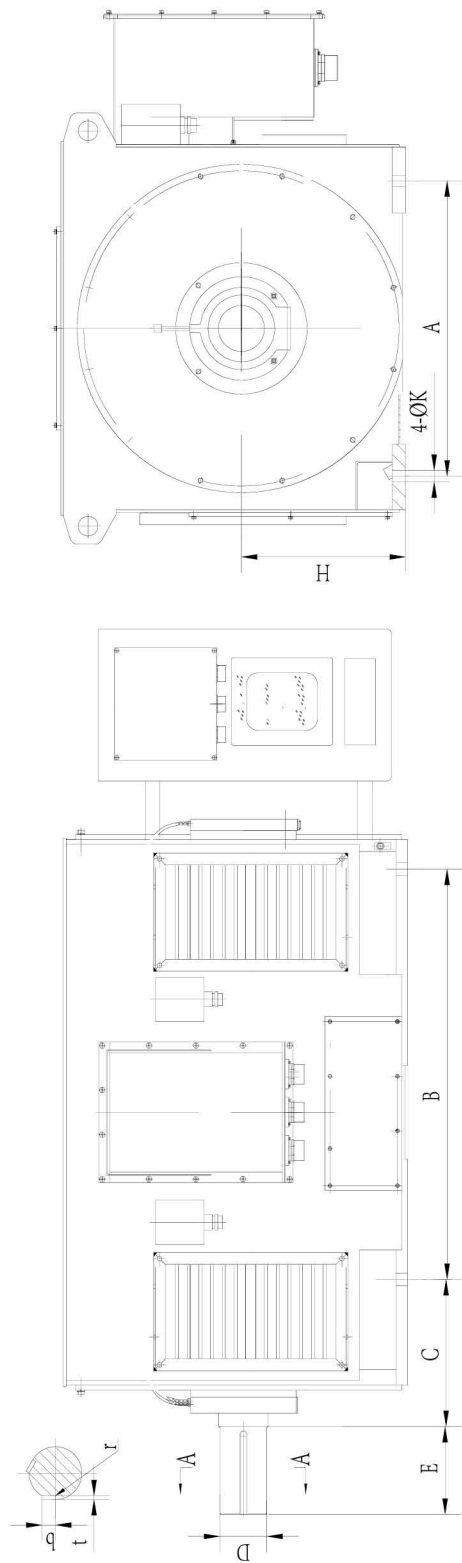

YR系列大型高压三相异步电动机外形图及安装尺寸（6000V/10000V）																			
安装尺寸及公差																			
机座	极数	A		B		C		D		E		t		r		H		K	
		基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	最大尺寸	基本尺寸	极限偏差	基本尺寸	极限偏差
800	4-12	1600	±2.8	2000	±2.8	530		220	+0.046	350	±0.70	16		57.1		800		56	
900	4-12	1800		2240		600	±4.2	250	+0.017	410		18	+0.3 0	64.6		900	0 -1.5		
																		66	
1000	4-12	2000	±3.5	2500	±3.5			280	+0.052 +0.020	470	±0.77	20		72.1		1000			
注：样本数据供需方参考，订货时以供方提供外形图为准，如有变动供方恕不通知。																			

YR800-1000系列高压6kV数据

型号	额定功率 kW	同步转速 r/min	定子电流 A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 $\cos \phi$	
YR800-4	4500	1500	517.4	96.2	0.87	1.8
YR800-4	5000	1500	574.3	96.3	0.87	1.8
YR800-4	5600	1500	642.5	96.4	0.87	1.8
YR800-6	3150	1000	372.2	95.8	0.85	1.8
YR800-6	3550	1000	419.1	95.9	0.85	1.8
YR800-6	4000	1000	471.7	96.0	0.85	1.8
YR800-6	4500	1000	530.1	96.1	0.85	1.8
YR800-8	2500	750	304.1	95.3	0.83	1.8
YR800-8	2800	750	340.3	95.4	0.83	1.8
YR800-8	3150	750	377.9	95.5	0.84	1.8
YR800-10	2000	600	250.9	94.7	0.81	1.8
YR800-10	2240	600	280.7	94.8	0.81	1.8
YR800-10	2500	600	313.0	94.9	0.81	1.8
YR800-12	1600	500	209.8	94.1	0.78	1.8
YR800-12	1800	500	235.7	94.2	0.78	1.8
YR800-12	2000	500	261.7	94.3	0.78	1.8
YR800-12	2240	500	292.7	94.4	0.78	1.8
YR800-16	1000	375	143.9	92.9	0.72	1.8
YR800-16	1120	375	161.0	93.0	0.72	1.8
YR800-16	1250	375	179.4	93.1	0.72	1.8
YR800-16	1400	375	200.8	93.2	0.72	1.8
YR900-8	3550	750	425.4	95.6	0.84	1.8

YR800-1000系列高压6kV数据

型号	额定功率 kW	同步转速 r/min	定子电流 A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 $\cos \phi$	
YR900-8	4000	750	478.8	95.7	0.84	1.8
YR900-8	4500	750	538.1	95.8	0.84	1.8
YR900-10	2800	600	345.9	95.0	0.82	1.8
YR900-10	3150	600	388.7	95.1	0.82	1.8
YR900-10	3550	600	437.6	95.2	0.82	1.8
YR900-10	4000	600	492.6	95.3	0.82	1.8
YR900-12	2500	500	322.2	94.5	0.79	1.8
YR900-12	2800	500	360.5	94.6	0.79	1.8
YR900-12	3150	500	405.2	94.7	0.79	1.8
YR900-16	1600	375	223.0	93.3	0.74	1.8
YR900-16	1800	375	250.6	93.4	0.74	1.8
YR900-16	2000	375	278.2	93.5	0.74	1.8
YR1000-10	4500	600	553.5	95.4	0.82	1.8
YR1000-10	5000	600	614.4	95.5	0.82	1.8
YR1000-10	5600	600	688.1	95.5	0.82	1.8
YR1000-12	3550	500	456.1	94.8	0.79	1.8
YR1000-12	4000	500	513.4	94.9	0.79	1.8
YR1000-12	4500	500	577.0	95.0	0.79	1.8
YR1000-12	5000	500	640.4	95.1	0.79	1.8
YR1000-16	2240	375	311.2	93.6	0.74	1.8
YR1000-16	2500	376	347.0	93.7	0.74	1.8
YR1000-16	2800	377	388.2	93.8	0.74	1.8

YR800-1000系列高压10kV数据

型号	额定功率 kW	同步转速 r/min	定子电流A	额定负载下		最大转矩/ 额定转矩 (标准值)
				效率% (标准值)	功率因数 $\cos \phi$	
YR800-4	4000	1500	280.0	95.9	0.86	1.8
YR800-4	4500	1500	314.7	96.0	0.86	1.8
YR800-4	5000	1500	349.3	96.1	0.86	1.8
YR800-4	5600	1500	390.8	96.2	0.86	1.8
YR800-6	2800	1000	204.0	95.5	0.83	1.8
YR800-6	3150	1000	226.5	95.6	0.84	1.8
YR800-6	3550	1000	255.0	95.7	0.84	1.8
YR800-8	2500	750	185.3	95.0	0.82	1.8
YR800-8	2800	750	207.3	95.1	0.82	1.8
YR900-6	4000	1000	287.0	95.8	0.84	1.8
YR900-6	4500	1000	322.5	95.9	0.84	1.8
YR900-6	5000	1000	358.0	96.0	0.84	1.8
YR900-8	3150	750	233.0	95.2	0.82	1.8
YR900-8	3550	750	259.1	95.3	0.83	1.8
YR900-10	2500	600	190.7	94.6	0.80	1.8
YR900-10	2800	600	213.4	94.7	0.80	1.8
YR1000-8	4000	750	291.7	95.4	0.83	1.8
YR1000-8	4500	750	327.8	95.5	0.83	1.8
YR1000-8	5000	750	363.8	95.6	0.83	1.8
YR1000-10	3150	600	236.8	94.8	0.81	1.8
YR1000-10	3550	600	266.6	94.9	0.81	1.8
YR1000-12	2500	500	199.0	94.2	0.77	1.8
YR1000-12	2800	500	222.6	94.3	0.77	1.8
YR1000-12	3150	500	247.0	94.4	0.78	1.8
YR1000-12	3550	500	278.1	94.5	0.78	1.8