


YB高压隔爆型三相异步电动机安装尺寸

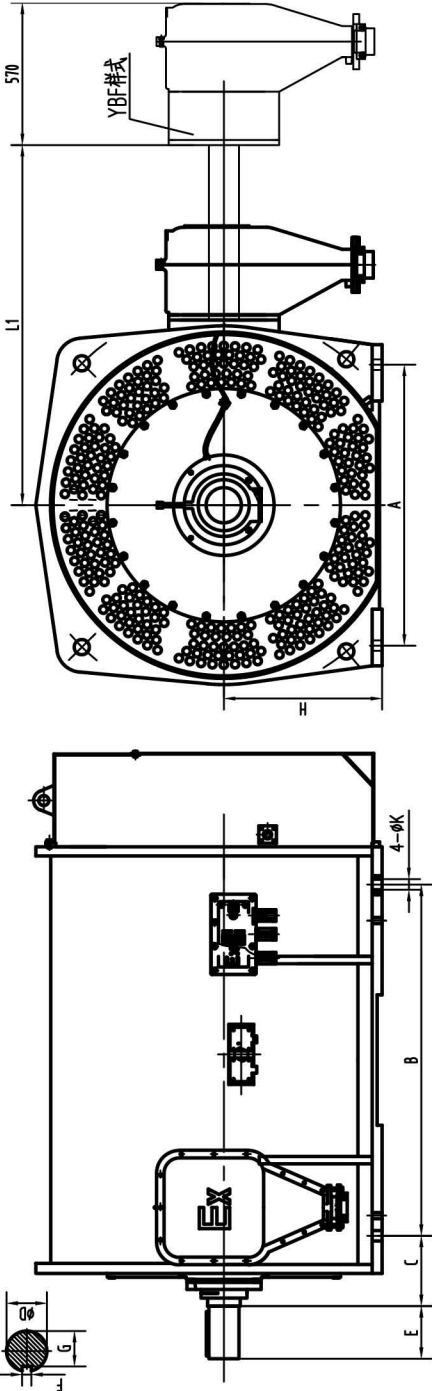

YB高压隔爆型三相异步电动机H560-800

YB系列高压隔爆型三相异步电动机																			
		安 装 尺 寸 及 公 差																	
机座号	极数	A		B		C		D		E		F		G		H	K		
		基本尺寸	尺寸偏差	基本尺寸	尺寸偏差	基本尺寸	尺寸偏差	基本尺寸	尺寸偏差	基本尺寸	尺寸偏差	基本尺寸	尺寸偏差	基本尺寸	尺寸偏差	基本尺寸	尺寸偏差		
560S	2	950	1120	280	85	170	110	210	76	560	42	0	-1	630	0	+0.62 0			
	4-16				120												210	109	
	6-16				130												250	119	
560M	2	1120	1250	425	170	280	210	86	0	710	48	0	-1.5	800	0	-0.3			
	4			280													300	157	
	6-16			425													335	165	
630S	2	1120	1250	425	170	280	210	86	0	710	48	0	-1.5	800	0	-0.3			
	4			280													300	157	
	6-16			425													335	165	
630M	2	1120	1400	±1.75	95	210	120	250	109	0	710	48	0	-1.5	800	0	-0.3		
	4				120													210	109
	6-16				130													250	119
710S	2	1180	1250	±4.0	120	210	140	250	109	0	710	48	0	-1.5	800	0	-0.3		
	4				140													250	128
	6-16				150													250	138
710M	2	1180	1400	±4.0	120	210	120	250	109	0	710	48	0	-1.5	800	0	-0.3		
	4				140													250	128
	6-16				150													250	138
800S	2	1250	1400	±2.1	140	250	140	300	128	0	710	48	0	-1.5	800	0	-0.3		
	4				150													250	138
	6-16				170													300	157
800M	2	1250	1400	±2.1	140	250	140	300	128	0	710	48	0	-1.5	800	0	-0.3		
	4				170													300	157
	6-16				180													300	165

YB高压隔爆型三相异步电动机性能参数6KV

型号 Type	功率 kW	电流 A	转速 r/min	效率 %	功率因数 COS ϕ	堵转转矩/ 额定转矩	堵转电流/ 额定电流	最大转矩/ 额定转矩
YB3-560-2	500	61.2	2985	93.6	0.84	0.6	7	1.8
YB3-560-2	560	68.4	2985	93.8	0.84	0.6	7	1.8
YB3-560-2	630	75.9	2985	94	0.85	0.6	7	1.8
YB3-560-2	710	85.4	2985	94.1	0.85	0.6	7	1.8
YB3-560-2	800	96.0	2985	94.3	0.85	0.6	7	1.8
YB3-560-2	900	107.8	2985	94.5	0.85	0.6	7	1.8
YB3-630-2	800	96.0	2985	94.3	0.85	0.6	7	1.8
YB3-630-2	900	107.8	2985	94.5	0.85	0.6	7	1.8
YB3-630-2	1000	119.7	2985	94.6	0.85	0.6	7	1.8
YB3-630-2	1120	133.9	2985	94.7	0.85	0.6	7	1.8
YB3-630-2	1250	149.1	2985	94.9	0.85	0.6	7	1.8
YB3-630-2	1400	164.9	2985	95	0.86	0.6	7	1.8
YB3-710-2	1250	149.1	2985	94.9	0.85	0.6	7	1.8
YB3-710-2	1400	164.9	2985	95	0.86	0.6	7	1.8
YB3-710-2	1600	188.3	2985	95.1	0.86	0.6	7	1.8
YB3-710-2	1800	211.6	2985	95.2	0.86	0.6	7	1.8
YB3-710-2	2000	234.6	2985	95.4	0.86	0.6	7	1.8
YB3-800-2	2000	234.6	2985	95.4	0.86	0.6	7	1.8
YB3-800-2	2240	262.5	2985	95.5	0.86	0.6	7	1.8
YB3-800-2	2500	292.6	2985	95.6	0.86	0.6	7	1.8
YB3-800-2	2800	327.7	2985	95.6	0.86	0.6	7	1.8
YB3-800-2	3150	368.3	2985	95.7	0.86	0.6	7	1.8
YB3-560-4	500	61.3	1485	93.4	0.84	0.6	6.5	1.8
YB3-560-4	560	68.5	1485	93.6	0.84	0.6	6.5	1.8
YB3-560-4	630	76.9	1485	93.8	0.84	0.6	6.5	1.8
YB3-560-4	710	86.5	1485	94	0.84	0.6	6.5	1.8
YB3-560-4	800	96.0	1485	94.3	0.85	0.6	6.5	1.8
YB3-560-4	900	107.9	1485	94.4	0.85	0.6	6.5	1.8
YB3-630-4	800	96.0	1485	94.3	0.85	0.6	6.5	1.8
YB3-630-4	900	107.9	1485	94.4	0.85	0.6	6.5	1.8
YB3-630-4	1000	119.8	1485	94.5	0.85	0.6	6.5	1.8
YB3-630-4	1120	134.0	1485	94.6	0.85	0.6	6.5	1.8
YB3-630-4	1250	147.5	1485	94.8	0.86	0.6	6.5	1.8
YB3-630-4	1400	165.1	1485	94.9	0.86	0.6	6.5	1.8
YB3-710-4	1250	147.5	1485	94.8	0.86	0.6	6.5	1.8
YB3-710-4	1400	165.1	1485	94.9	0.86	0.6	6.5	1.8
YB3-710-4	1600	188.5	1485	95	0.86	0.6	6.5	1.8
YB3-710-4	1800	211.8	1485	95.1	0.86	0.6	6.5	1.8
YB3-710-4	2000	234.8	1485	95.3	0.86	0.6	6.5	1.8
YB3-800-4	2000	234.8	1485	95.3	0.86	0.6	6.5	1.8
YB3-800-4	2240	262.7	1485	95.4	0.86	0.6	6.5	1.8

YB高压隔爆型三相异步电动机性能参数6KV

型号 Type	功率 kW	电流 A	转速 r/min	效率 %	功率因数 COS ϕ	堵转转矩/ 额定转矩	堵转电流/ 额定电流	最大转矩/ 额定转矩
YB3-800-4	2500	292.9	1485	95.5	0.86	0.6	6.5	1.8
YB3-800-4	2800	327.7	1485	95.6	0.86	0.6	6.5	1.8
YB3-800-4	3150	367.9	1485	95.8	0.86	0.6	6.5	1.8
YB3-560-6	315	40.8	990	92.8	0.8	0.7	6.5	1.8
YB3-560-6	355	45.3	990	93	0.81	0.7	6.5	1.8
YB3-560-6	400	51.0	990	93.1	0.81	0.7	6.5	1.8
YB3-560-6	450	57.2	990	93.4	0.81	0.7	6.5	1.8
YB3-560-6	500	63.4	990	93.7	0.81	0.7	6.5	1.8
YB3-560-6	560	70.1	990	93.8	0.82	0.7	6.5	1.8
YB3-560-6	630	78.7	990	93.9	0.82	0.7	6.5	1.8
YB3-630-6	630	78.7	990	93.9	0.82	0.7	6.5	1.8
YB3-630-6	710	88.4	990	94.2	0.82	0.7	6.5	1.8
YB3-630-6	800	99.5	990	94.4	0.82	0.7	6.5	1.8
YB3-630-6	900	110.4	990	94.5	0.83	0.7	6.5	1.8
YB3-630-6	1000	122.6	990	94.6	0.83	0.7	6.5	1.8
YB3-710-6	1000	122.6	990	94.6	0.83	0.7	6.5	1.8
YB3-710-6	1120	137.1	990	94.7	0.83	0.7	6.5	1.8
YB3-710-6	1250	150.9	990	94.9	0.84	0.7	6.5	1.8
YB3-710-6	1400	168.8	990	95	0.84	0.7	6.5	1.8
YB3-800-6	1600	192.7	990	95.1	0.84	0.7	6.5	1.8
YB3-800-6	1800	216.6	990	95.2	0.84	0.7	6.5	1.8
YB3-800-6	2000	240.2	990	95.4	0.84	0.7	6.5	1.8
YB3-800-6	2240	268.7	990	95.5	0.84	0.7	6.5	1.8
YB3-560-8	315	42.5	745	92.7	0.77	0.7	6	1.8
YB3-560-8	355	47.8	745	92.8	0.77	0.7	6	1.8
YB3-560-8	400	53.1	745	93	0.78	0.7	6	1.8
YB3-560-8	450	59.6	745	93.1	0.78	0.7	6	1.8
YB3-630-8	500	65.9	745	93.6	0.78	0.7	6	1.8
YB3-630-8	560	73.7	745	93.8	0.78	0.7	6	1.8
YB3-630-8	630	80.7	745	93.9	0.8	0.7	6	1.8
YB3-630-8	710	90.9	745	94	0.8	0.7	6	1.8
YB3-710-8	800	102.2	745	94.2	0.8	0.7	6	1.8
YB3-710-8	900	112.0	745	94.3	0.82	0.7	6	1.8
YB3-710-8	1000	124.3	745	94.4	0.82	0.7	6	1.8
YB3-710-8	1120	139.1	745	94.5	0.82	0.7	6	1.8
YB3-800-8	1120	139.1	745	94.5	0.82	0.7	6	1.8
YB3-800-8	1250	154.9	745	94.7	0.82	0.7	6	1.8
YB3-800-8	1400	173.3	745	94.8	0.82	0.7	6	1.8
YB3-800-8	1600	197.9	745	94.9	0.82	0.7	6	1.8
YB3-800-8	1800	222.3	745	95	0.82	0.7	6	1.8
YB3-560-10	185	26.9	590	90.8	0.73	0.7	6	1.8

YB高压隔爆型三相异步电动机性能参数6KV

型号 Type	功率 kW	电流 A	转速 r/min	效率 %	功率因数 COS ϕ	堵转转矩/ 额定转矩	堵转电流/ 额定电流	最大转矩/ 额定转矩
YB3-560-10	200	28.9	590	91.1	0.73	0.7	6	1.8
YB3-560-10	220	31.8	590	91.3	0.73	0.7	6	1.8
YB3-560-10	250	36.0	590	91.5	0.73	0.7	6	1.8
YB3-560-10	280	40.3	590	91.7	0.73	0.7	6	1.8
YB3-560-10	315	44.5	590	92.1	0.74	0.7	6	1.8
YB3-560-10	355	50.0	590	92.3	0.74	0.7	6	1.8
YB3-630-10	280	40.3	590	91.7	0.73	0.7	6	1.8
YB3-630-10	315	44.5	590	92.1	0.74	0.7	6	1.8
YB3-630-10	355	50.0	590	92.3	0.74	0.7	6	1.8
YB3-630-10	400	56.2	590	92.6	0.74	0.7	6	1.8
YB3-630-10	450	63.1	590	92.7	0.74	0.7	6	1.8
YB3-630-10	500	68.1	590	93	0.76	0.7	6	1.8
YB3-630-10	560	76.2	590	93.1	0.76	0.7	6	1.8
YB3-630-10	630	85.6	590	93.2	0.76	0.7	6	1.8
YB3-710-10	500	68.1	590	93	0.76	0.7	6	1.8
YB3-710-10	560	76.2	590	93.1	0.76	0.7	6	1.8
YB3-710-10	630	85.6	590	93.2	0.76	0.7	6	1.8
YB3-710-10	710	96.2	590	93.4	0.76	0.7	6	1.8
YB3-710-10	800	105.3	590	93.7	0.78	0.7	6	1.8
YB3-710-10	900	118.4	590	93.8	0.78	0.7	6	1.8
YB3-800-10	800	105.3	590	93.7	0.78	0.7	6	1.8
YB3-800-10	900	118.4	590	93.8	0.78	0.7	6	1.8
YB3-800-10	1000	131.4	590	93.9	0.78	0.7	6	1.8
YB3-800-10	1120	146.8	590	94.1	0.78	0.7	6	1.8
YB3-800-10	1250	163.4	590	94.4	0.78	0.7	6	1.8
YB3-800-10	1400	182.8	590	94.5	0.78	0.7	6	1.8
YB3-800-10	1600	208.7	590	94.6	0.78	0.7	6	1.8
YB3-560-12	185	29.4	495	91.8	0.66	0.8	5.5	1.8
YB3-560-12	200	31.7	495	92	0.66	0.8	5.5	1.8
YB3-560-12	220	33.8	495	92.2	0.68	0.8	5.5	1.8
YB3-560-12	250	38.2	495	92.5	0.68	0.8	5.5	1.8
YB3-630-12	220	34.1	495	91.4	0.68	0.7	6	1.8
YB3-630-12	250	38.6	495	91.7	0.68	0.7	6	1.8
YB3-630-12	280	43.1	495	91.9	0.68	0.7	6	1.8
YB3-630-12	315	48.4	495	92.1	0.68	0.7	6	1.8
YB3-630-12	355	52.9	495	92.3	0.7	0.7	6	1.8
YB3-630-12	400	59.4	495	92.6	0.7	0.7	6	1.8
YB3-630-12	450	66.7	495	92.7	0.7	0.7	6	1.8
YB3-710-12	355	52.9	495	92.3	0.7	0.7	6	1.8
YB3-710-12	400	59.4	495	92.6	0.7	0.7	6	1.8
YB3-710-12	450	66.7	495	92.7	0.7	0.7	6	1.8

YB高压隔爆型三相异步电动机性能参数6KV

型号 Type	功率 kW	电流 A	转速 r/min	效率 %	功率因数 COS ϕ	堵转转矩/ 额定转矩	堵转电流/ 额定电流	最大转矩/ 额定转矩
YB3-710-12	500	73.8	495	93.1	0.7	0.7	6	1.8
YB3-710-12	560	80.3	495	93.2	0.72	0.7	6	1.8
YB3-710-12	630	90.2	495	93.3	0.72	0.7	6	1.8
YB3-800-12	500	73.8	495	93.1	0.7	0.7	6	1.8
YB3-800-12	560	80.3	495	93.2	0.72	0.7	6	1.8
YB3-800-12	630	90.2	495	93.3	0.72	0.7	6	1.8
YB3-800-12	710	101.6	495	93.4	0.72	0.7	6	1.8
YB3-800-12	800	114.1	495	93.7	0.72	0.7	6	1.8
YB3-800-12	900	128.2	495	93.8	0.72	0.7	6	1.8
YB3-800-12	1000	142.3	495	93.9	0.72	0.7	6	1.8
YB3-800-12	1120	159.2	495	94	0.72	0.7	6	1.8
YB3-560-14	185	28.0	418	92	0.69	0.7	6	1.8
YB3-560-14	200	30.3	418	92.1	0.69	0.7	6	1.8
YB3-630-14	220	32.8	418	92.2	0.7	0.7	6	1.8
YB3-630-14	250	37.2	418	92.3	0.7	0.7	6	1.8
YB3-630-14	280	41.7	418	92.4	0.7	0.7	6	1.8
YB3-630-14	315	46.8	418	92.5	0.7	0.7	6	1.8
YB3-630-14	355	52.0	418	92.6	0.71	0.7	6	1.8
YB3-630-14	400	58.5	418	92.7	0.71	0.7	6	1.8
YB3-710-14	355	52.0	418	92.6	0.71	0.7	6	1.8
YB3-710-14	400	58.5	418	92.7	0.71	0.7	6	1.8
YB3-710-14	450	65.7	418	92.8	0.71	0.7	6	1.8
YB3-710-14	500	72.9	418	92.9	0.71	0.7	6	1.8
YB3-800-14	560	81.6	418	93	0.71	0.7	6	1.8
YB3-800-14	630	91.7	418	93.1	0.71	0.7	6	1.8
YB3-800-14	710	103.2	418	93.2	0.71	0.7	6	1.8
YB3-800-14	800	116.2	418	93.3	0.71	0.7	6	1.8
YB3-630-16	185	29.4	365	91.8	0.66	0.6	6.5	1.8
YB3-630-16	200	31.7	365	91.9	0.66	0.6	6.5	1.8
YB3-630-16	220	34.9	365	92	0.66	0.6	6.5	1.8
YB3-630-16	250	39.6	365	92.1	0.66	0.6	6.5	1.8
YB3-710-16	200	31.7	365	91.9	0.66	0.6	6.5	1.8
YB3-710-16	220	34.9	365	92	0.66	0.6	6.5	1.8
YB3-710-16	250	39.6	365	92.1	0.66	0.6	6.5	1.8
YB3-710-16	280	42.8	365	92.3	0.66	0.6	6.5	1.8
YB3-710-16	315	49.7	365	92.4	0.66	0.6	6.5	1.8
YB3-710-16	355	56.0	365	92.5	0.66	0.6	6.5	1.8
YB3-710-16	400	63.0	365	92.6	0.66	0.6	6.5	1.8
YB3-800-16	450	67.7	365	92.7	0.69	0.6	6.5	1.8
YB3-800-16	500	75.1	365	92.8	0.69	0.6	6.5	1.8
YB3-800-16	560	84.1	365	92.9	0.69	0.6	6.5	1.8
YB3-800-16	630	94.5	365	93	0.69	0.6	6.5	1.8

YB高压隔爆型三相异步电动机性能参数10KV

型号 Type	功率 kW	电流 A	转速 r/min	效率 %	功率因数 COS ϕ	堵转转矩/ 额定转矩	堵转电流/ 额定电流	最大转矩/ 额定转矩
YB3-560-2	355	26.3	2985	92.8	0.84	0.6	7	1.8
YB3-560-2	400	29.5	2985	93.1	0.84	0.6	7	1.8
YB3-560-2	450	33.2	2985	93.3	0.84	0.6	7	1.8
YB3-560-2	500	36.8	2985	93.4	0.84	0.6	7	1.8
YB3-560-2	560	41.1	2985	93.6	0.84	0.6	7	1.8
YB3-560-2	630	45.7	2985	93.7	0.85	0.6	7	1.8
YB3-560-2	710	51.4	2985	93.8	0.85	0.6	7	1.8
YB3-630-2	560	41.1	2985	93.6	0.84	0.6	7	1.8
YB3-630-2	630	45.7	2985	93.7	0.85	0.6	7	1.8
YB3-630-2	710	51.4	2985	93.8	0.85	0.6	7	1.8
YB3-630-2	800	57.8	2985	94	0.85	0.6	7	1.8
YB3-630-2	900	65.0	2985	94.1	0.85	0.6	7	1.8
YB3-630-2	1000	72.1	2985	94.2	0.85	0.6	7	1.8
YB3-630-2	1120	80.6	2985	94.4	0.85	0.6	7	1.8
YB3-710-2	900	65.0	2985	94.1	0.85	0.6	7	1.8
YB3-710-2	1000	72.1	2985	94.2	0.85	0.6	7	1.8
YB3-710-2	1120	80.6	2985	94.4	0.85	0.6	7	1.8
YB3-710-2	1250	89.8	2985	94.6	0.85	0.6	7	1.8
YB3-710-2	1400	100.3	2985	94.8	0.85	0.6	7	1.8
YB3-710-2	1600	113.2	2985	94.9	0.86	0.6	7	1.8
YB3-710-2	1800	127.2	2985	95	0.86	0.6	7	1.8
YB3-800-2	1600	113.2	2985	94.9	0.86	0.6	7	1.8
YB3-800-2	1800	127.2	2985	95	0.86	0.6	7	1.8
YB3-800-2	2000	141.0	2985	95.2	0.86	0.6	7	1.8
YB3-800-2	2240	157.6	2985	95.4	0.86	0.6	7	1.8
YB3-800-2	2500	175.9	2985	95.4	0.86	0.6	7	1.8
YB3-900-2	2500	175.9	2985	95.4	0.86	0.6	7	1.8
YB3-900-2	2800	196.8	2985	95.5	0.86	0.6	7	1.8
YB3-900-2	3150	221.2	2985	95.6	0.86	0.6	7	1.8
YB3-900-2	3550	249.3	2985	95.6	0.86	0.6	7	1.8
YB3-560-4	355	26.4	1485	92.3	0.84	0.6	7	1.8
YB3-560-4	400	29.7	1485	92.5	0.84	0.6	7	1.8
YB3-560-4	450	33.3	1485	92.9	0.84	0.6	7	1.8
YB3-560-4	500	37.0	1485	93	0.84	0.6	7	1.8
YB3-560-4	560	41.3	1485	93.3	0.84	0.6	7	1.8
YB3-560-4	630	46.3	1485	93.5	0.84	0.6	7	1.8
YB3-560-4	710	51.9	1485	94.1	0.84	0.6	7	1.8
YB3-630-4	560	41.3	1485	93.3	0.84	0.6	7	1.8
YB3-630-4	630	46.3	1485	93.5	0.84	0.6	7	1.8
YB3-630-4	710	51.9	1485	94.1	0.84	0.6	7	1.8

YB高压隔爆型三相异步电动机性能参数10KV

型号 Type	功率 kW	电流 A	转速 r/min	效率 %	功率因数 COS ϕ	堵转转矩/ 额定转矩	堵转电流/ 额定电流	最大转矩/ 额定转矩
YB3-630-4	800	57.6	1485	94.3	0.85	0.6	7	1.8
YB3-630-4	900	64.8	1485	94.4	0.85	0.6	7	1.8
YB3-630-4	1000	71.9	1485	94.5	0.85	0.6	7	1.8
YB3-630-4	1120	80.4	1485	94.6	0.85	0.6	7	1.8
YB3-710-4	900	64.8	1485	94.4	0.85	0.6	7	1.8
YB3-710-4	1000	71.9	1485	94.5	0.85	0.6	7	1.8
YB3-710-4	1120	80.4	1485	94.6	0.85	0.6	7	1.8
YB3-710-4	1250	88.6	1485	94.7	0.86	0.6	7	1.8
YB3-710-4	1400	98.9	1485	95	0.86	0.6	7	1.8
YB3-710-4	1600	113.0	1485	95.1	0.86	0.6	7	1.8
YB3-710-4	1800	126.9	1485	95.2	0.86	0.6	7	1.8
YB3-800-4	1600	113.0	1485	95.1	0.86	0.6	7	1.8
YB3-800-4	1800	126.9	1485	95.2	0.86	0.6	7	1.8
YB3-800-4	2000	140.7	1485	95.4	0.86	0.6	7	1.8
YB3-800-4	2240	157.5	1485	95.5	0.86	0.6	7	1.8
YB3-800-4	2500	175.7	1485	95.5	0.86	0.6	7	1.8
YB3-900-4	2500	175.7	1485	95.5	0.86	0.6	7	1.8
YB3-900-4	2800	196.6	1485	95.6	0.86	0.6	7	1.8
YB3-900-4	3150	221.0	1485	95.7	0.86	0.6	7	1.8
YB3-900-4	3550	249.0	1485	95.7	0.86	0.6	7	1.8
YB3-900-4	4000	280.3	1485	95.8	0.86	0.6	7	1.8
YB3-560-6	280	22.6	990	91.7	0.78	0.6	6	1.8
YB3-560-6	315	24.7	990	92	0.8	0.6	6	1.8
YB3-560-6	355	27.4	990	92.2	0.81	0.6	6	1.8
YB3-560-6	400	30.9	990	92.4	0.81	0.6	6	1.8
YB3-560-6	450	34.6	990	92.6	0.81	0.6	6	1.8
YB3-560-6	500	38.3	990	93	0.81	0.6	6	1.8
YB3-630-6	450	34.6	990	92.6	0.81	0.6	6	1.8
YB3-630-6	500	38.3	990	93	0.81	0.6	6	1.8
YB3-630-6	560	42.3	990	93.3	0.82	0.6	6	1.8
YB3-630-6	630	47.4	990	93.6	0.82	0.6	6	1.8
YB3-630-6	710	53.3	990	93.8	0.82	0.6	6	1.8
YB3-630-6	800	59.9	990	94	0.82	0.6	6	1.8
YB3-630-6	900	66.5	990	94.2	0.83	0.6	6	1.8
YB3-710-6	710	53.3	990	93.8	0.82	0.6	6	1.8
YB3-710-6	800	59.9	990	94	0.82	0.6	6	1.8
YB3-710-6	900	66.5	990	94.2	0.83	0.6	6	1.8
YB3-710-6	1000	73.7	990	94.4	0.83	0.6	6	1.8
YB3-710-6	1120	82.4	990	94.6	0.83	0.6	6	1.8
YB3-710-6	1250	90.7	990	94.7	0.84	0.6	6	1.8

YB高压隔爆型三相异步电动机性能参数10KV

型号 Type	功率 kW	电流 A	转速 r/min	效率 %	功率因数 COS ϕ	堵转转矩/ 额定转矩	堵转电流/ 额定电流	最大转矩/ 额定转矩
YB3-710-6	1400	101.2	990	95.1	0.84	0.6	6	1.8
YB3-800-6	1250	90.7	990	94.7	0.84	0.6	6	1.8
YB3-800-6	1400	101.2	990	95.1	0.84	0.6	6	1.8
YB3-800-6	1600	115.5	990	95.2	0.84	0.6	6	1.8
YB3-800-6	1800	129.8	990	95.3	0.84	0.6	6	1.8
YB3-800-6	2000	144.1	990	95.4	0.84	0.6	6	1.8
YB3-800-6	2240	161.4	990	95.4	0.84	0.6	6	1.8
YB3-900-6	2000	144.1	990	95.4	0.84	0.6	6	1.8
YB3-900-6	2240	161.4	990	95.4	0.84	0.6	6	1.8
YB3-900-6	2500	179.7	990	95.6	0.84	0.6	6	1.8
YB3-900-6	2800	201.3	990	95.6	0.84	0.6	6	1.8
YB3-560-8	220	19.1	745	91.1	0.73	0.7	6	1.8
YB3-560-8	250	21.7	745	91.3	0.73	0.7	6	1.8
YB3-560-8	280	23.8	745	91.6	0.74	0.7	6	1.8
YB3-560-8	315	26.4	745	92	0.75	0.7	6	1.8
YB3-560-8	355	29.6	745	92.4	0.75	0.7	6	1.8
YB3-630-8	355	29.6	745	92.4	0.75	0.7	6	1.8
YB3-630-8	400	32.9	745	92.5	0.76	0.7	6	1.8
YB3-630-8	450	36.9	745	92.7	0.76	0.7	6	1.8
YB3-630-8	500	40.3	745	93.1	0.77	0.7	6	1.8
YB3-630-8	560	45.0	745	93.3	0.77	0.7	6	1.8
YB3-630-8	630	48.5	745	93.8	0.8	0.7	6	1.8
YB3-710-8	560	45.0	745	93.3	0.77	0.7	6	1.8
YB3-710-8	630	48.5	745	93.8	0.8	0.7	6	1.8
YB3-710-8	710	54.5	745	94	0.8	0.7	6	1.8
YB3-710-8	800	61.3	745	94.2	0.8	0.7	6	1.8
YB3-710-8	900	68.9	745	94.3	0.8	0.7	6	1.8
YB3-710-8	1000	76.4	745	94.5	0.8	0.7	6	1.8
YB3-800-8	1000	76.4	745	94.5	0.8	0.7	6	1.8
YB3-800-8	1120	84.3	745	94.7	0.81	0.7	6	1.8
YB3-800-8	1250	94.0	745	94.8	0.81	0.7	6	1.8
YB3-800-8	1400	105.2	745	94.9	0.81	0.7	6	1.8
YB3-800-8	1600	120.2	745	94.9	0.81	0.7	6	1.8
YB3-900-8	1600	120.2	745	94.9	0.81	0.7	6	1.8
YB3-900-8	1800	135.1	745	95	0.81	0.7	6	1.8
YB3-900-8	2000	150.1	745	95	0.81	0.7	6	1.8
YB3-900-8	2240	168.1	745	95	0.81	0.7	6	1.8
YB3-560-10	185	17.0	590	90.9	0.69	0.7	6	1.8
YB3-560-10	200	18.4	590	91	0.69	0.7	6	1.8
YB3-560-10	220	19.9	590	91.1	0.7	0.7	6	1.8

YB高压隔爆型三相异步电动机性能参数10KV

型号 Type	功率 kW	电流 A	转速 r/min	效率 %	功率因数 COS ϕ	堵转转矩/ 额定转矩	堵转电流/ 额定电流	最大转矩/ 额定转矩
YB3-560-10	250	22.6	590	91.2	0.7	0.7	6	1.8
YB3-560-10	280	25.2	590	91.5	0.7	0.7	6	1.8
YB3-630-10	280	24.5	590	91.5	0.72	0.7	6	1.8
YB3-630-10	315	27.5	590	91.7	0.72	0.7	6	1.8
YB3-630-10	355	30.5	590	92.1	0.73	0.7	6	1.8
YB3-630-10	400	34.3	590	92.3	0.73	0.7	6	1.8
YB3-630-10	450	38.0	590	92.5	0.74	0.7	6	1.8
YB3-710-10	450	38.0	590	92.5	0.74	0.7	6	1.8
YB3-710-10	500	41.5	590	92.7	0.75	0.7	6	1.8
YB3-710-10	560	45.8	590	92.9	0.76	0.7	6	1.8
YB3-710-10	630	51.4	590	93.1	0.76	0.7	6	1.8
YB3-710-10	710	57.8	590	93.3	0.76	0.7	6	1.8
YB3-710-10	800	64.8	590	93.8	0.76	0.7	6	1.8
YB3-800-10	800	64.8	590	93.8	0.76	0.7	6	1.8
YB3-800-10	900	70.9	590	94	0.78	0.7	6	1.8
YB3-800-10	1000	78.7	590	94.1	0.78	0.7	6	1.8
YB3-800-10	1120	88.0	590	94.2	0.78	0.7	6	1.8
YB3-800-10	1250	98.2	590	94.2	0.78	0.7	6	1.8
YB3-800-10	1400	109.9	590	94.3	0.78	0.7	6	1.8
YB3-900-10	1250	98.2	590	94.2	0.78	0.7	6	1.8
YB3-900-10	1400	109.9	590	94.3	0.78	0.7	6	1.8
YB3-900-10	1600	125.6	590	94.3	0.78	0.7	6	1.8
YB3-900-10	1800	141.3	590	94.3	0.78	0.7	6	1.8
YB3-560-12	185	17.6	495	90.8	0.67	0.7	6	1.8
YB3-560-12	200	19.0	495	90.8	0.67	0.7	6	1.8
YB3-630-12	220	20.5	495	90.9	0.68	0.7	6	1.8
YB3-630-12	250	23.3	495	91.1	0.68	0.7	6	1.8
YB3-630-12	280	26.0	495	91.3	0.68	0.7	6	1.8
YB3-630-12	315	29.2	495	91.5	0.68	0.7	6	1.8
YB3-710-12	355	32.8	495	91.8	0.68	0.7	6	1.8
YB3-710-12	400	36.4	495	92	0.69	0.7	6	1.8
YB3-710-12	450	40.8	495	92.2	0.69	0.7	6	1.8
YB3-710-12	500	45.2	495	92.5	0.69	0.7	6	1.8
YB3-710-12	560	49.7	495	92.9	0.7	0.7	6	1.8
YB3-800-12	630	55.8	495	93.1	0.7	0.7	6	1.8
YB3-800-12	710	62.8	495	93.3	0.7	0.7	6	1.8
YB3-800-12	800	70.3	495	93.8	0.7	0.7	6	1.8
YB3-800-12	900	79.1	495	93.8	0.7	0.7	6	1.8
YB3-800-12	1000	87.9	495	93.8	0.7	0.7	6	1.8
YB3-900-12	1000	87.9	495	93.8	0.7	0.7	6	1.8

YB高压隔爆型三相异步电动机性能参数10KV

型号 Type	功率 kW	电流 A	转速 r/min	效率 %	功率因数 COS ϕ	堵转转矩/ 额定转矩	堵转电流/ 额定电流	最大转矩/ 额定转矩
YB3-900-12	1120	98.4	495	93.9	0.7	0.7	6	1.8
YB3-900-12	1250	109.8	495	93.9	0.7	0.7	6	1.8
YB3-900-12	1400	123.0	495	93.9	0.7	0.7	6	1.8
YB3-630-14	185	17.3	418	92	0.67	0.7	6	1.8
YB3-630-14	200	18.7	418	92	0.67	0.7	6	1.8
YB3-630-14	220	20.6	418	92.1	0.67	0.7	6	1.8
YB3-630-14	250	23.0	418	92.1	0.68	0.7	6	1.8
YB3-710-14	280	25.8	418	92.2	0.68	0.7	6	1.8
YB3-710-14	315	29.0	418	92.3	0.68	0.7	6	1.8
YB3-710-14	355	32.6	418	92.4	0.68	0.7	6	1.8
YB3-710-14	400	36.7	418	92.5	0.68	0.7	6	1.8
YB3-710-14	450	41.3	418	92.6	0.68	0.7	6	1.8
YB3-800-14	500	45.8	418	92.7	0.68	0.7	6	1.8
YB3-800-14	560	51.2	418	92.8	0.68	0.7	6	1.8
YB3-800-14	630	57.6	418	92.9	0.68	0.7	6	1.8
YB3-800-14	710	64.9	418	92.9	0.68	0.7	6	1.8
YB3-900-14	800	72.1	418	92.9	0.69	0.7	6	1.8
YB3-900-14	900	81.0	418	93	0.69	0.7	6	1.8
YB3-900-14	1000	90.0	418	93	0.69	0.7	6	1.8
YB3-900-14	1120	100.8	418	93	0.69	0.7	6	1.8
YB3-630-16	185	17.1	365	92	0.68	0.7	6	1.8
YB3-630-16	200	18.5	365	92	0.68	0.7	6	1.8
YB3-710-16	200	18.5	365	92	0.68	0.7	6	1.8
YB3-710-16	220	20.0	365	92.1	0.69	0.7	6	1.8
YB3-710-16	250	22.7	365	92.2	0.69	0.7	6	1.8
YB3-710-16	280	25.4	365	92.3	0.69	0.7	6	1.8
YB3-710-16	315	28.5	365	92.4	0.69	0.7	6	1.8
YB3-710-16	355	32.1	365	92.5	0.69	0.7	6	1.8
YB3-800-16	400	36.1	365	92.6	0.69	0.7	6	1.8
YB3-800-16	450	40.6	365	92.7	0.69	0.7	6	1.8
YB3-800-16	500	45.1	365	92.8	0.69	0.7	6	1.8
YB3-800-16	560	50.4	365	92.9	0.69	0.7	6	1.8
YB3-900-16	630	55.9	365	93	0.7	0.7	6	1.8
YB3-900-16	710	62.9	365	93.1	0.7	0.7	6	1.8
YB3-900-16	800	70.8	365	93.2	0.7	0.7	6	1.8
YB3-900-16	900	79.6	365	93.2	0.7	0.7	6	1.8