


YBX3高效率隔爆型三相异步电动机安装尺寸 (380V)

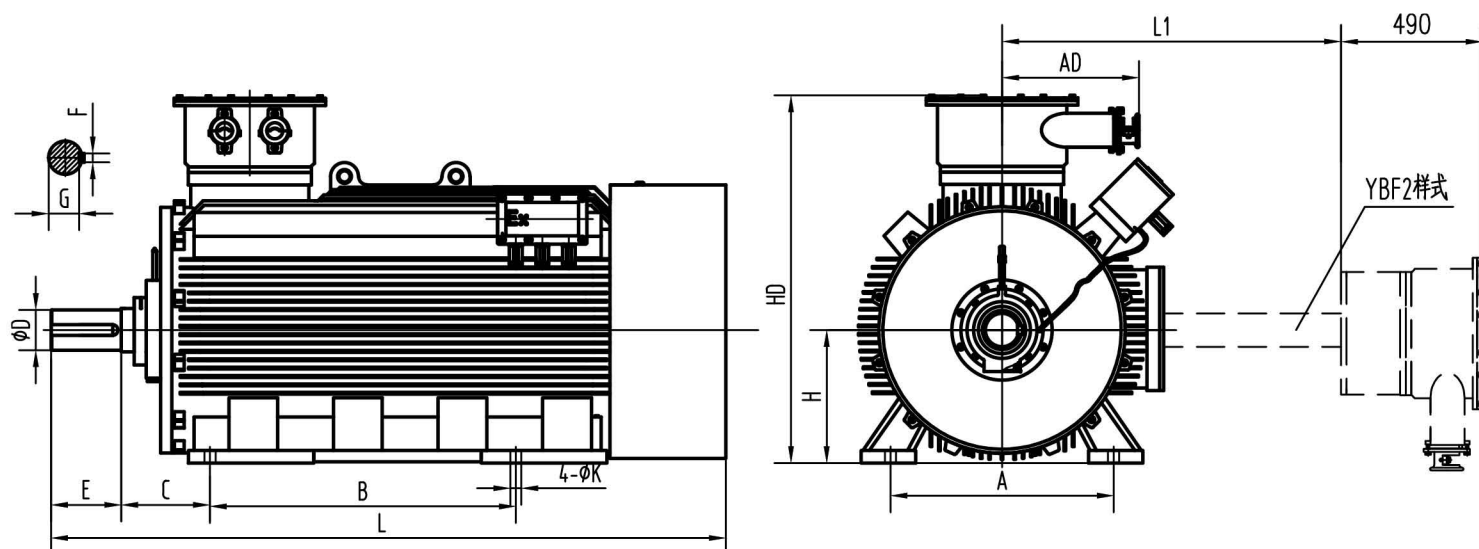

YBX3高效率隔爆型三相异步电动机外形安装尺寸及公差

机座号	极数	A		B		C		D		E		F		G		H		K		AD	HD	L		
		基本尺寸	尺寸偏差	基本尺寸	尺寸偏差	基本尺寸	尺寸偏差	基本尺寸	尺寸偏差	基本尺寸	尺寸偏差	基本尺寸	尺寸偏差	基本尺寸	尺寸偏差	基本尺寸	尺寸偏差	基本尺寸	尺寸偏差					
400	2	710		1000		280		85		170	±0.50	22		76		400					1200	2260		
	4-16							110		+0.035 +0.013	210	±0.57		28								0 -0.052	100	2300
450	2	800	±1.75	1120	±1.75	280		95		170	±0.50	25		86		450		35			1300	2460		
	4							120		210		32		0 -0.062								109	0 -0.2	2500
	6-16							130		+0.040 +0.015				250								119		
500	2	900		1250		315	±4.0	110	+0.035 +0.013	210		28	0 -0.052	100		500	0 -1		+0.62 0	490	1350	2900		
	4							130	250	±0.57		32		119								2900		
	6-16							140		36		128		0 -0.3										
560	2	1000		1400		530		130	+0.040 +0.015	250		32	0 -0.062	119	0 -0.2	560		42			1480	3250		
	4					150		36	138			0 -0.3	3100											
	6-16					160		300	±0.65	40	147	3100												

YBX3高效率隔爆型三相异步电动机性能参数 (380V)

型号 Type	功率 kW	电流 A	转速 r/min	效率 %	功率因数 COS ϕ	堵转转矩/ 额定转矩	堵转电流/ 额定电流	最大转矩 /额定转 矩
YBX3 400-2	355	639.8	2985	95.8	0.88	1.1	7	2.2
YBX3 400-2	400	720.9	2985	95.8	0.88	1.1	7	2.2
YBX3 400-2	450	811.0	2985	95.8	0.88	1.1	7	2.2
YBX3 400-2	500	901.1	2985	95.8	0.88	1.1	7	2.2
YBX3 400-2	560	1009.3	2985	95.8	0.88	1.1	7	2.2
YBX3 400-2	630	1120.3	2985	96	0.89	1.1	7	2.2
YBX3 450-2	560	1009.3	2985	95.8	0.88	1.1	7	2.2
YBX3 450-2	630	1120.3	2985	96	0.89	1.1	7	2.2
YBX3 450-2	710	1262.6	2985	96	0.89	1.1	7	2.2
YBX3 450-2	800	1419.7	2985	96.2	0.89	1.1	7	2.2
YBX3 450-2	900	1597.2	2985	96.2	0.89	1.1	7	2.2
YBX3 450-2	1000	1774.6	2985	96.2	0.89	1.1	7	2.2
YBX3 400-4	355	654.7	1485	95.8	0.86	1	6.5	2.2
YBX3 400-4	400	737.7	1485	95.8	0.86	1	6.5	2.2
YBX3 400-4	450	829.9	1485	95.8	0.86	1	6.5	2.2
YBX3 400-4	500	922.1	1485	95.8	0.86	1	6.5	2.2
YBX3 400-4	560	1020.9	1485	95.8	0.87	1	6.5	2.2
YBX3 400-4	630	1146.1	1485	96	0.87	1	6.5	2.2
YBX3 400-4	710	1291.6	1485	96	0.87	1	6.5	2.2
YBX3 450-4	630	1146.1	1485	96	0.87	1	6.5	2.2
YBX3 450-4	710	1291.6	1485	96	0.87	1	6.5	2.2
YBX3 450-4	800	1438.8	1485	96	0.88	1	6.5	2.2
YBX3 450-4	900	1618.7	1485	96	0.88	1	6.5	2.2
YBX3 450-4	1000	1798.5	1485	96	0.88	1	6.5	2.2
YBX3 450-4	1120	2010.2	1485	96.2	0.88	1	6.5	2.2
YBX3 500-4	1250	2218.3	1485	96.2	0.89	0.8	6.5	2
YBX3 500-4	1400	2484.5	1485	96.2	0.89	0.8	6.5	2
YBX3 500-4	1600	2839.4	1485	96.2	0.89	0.8	6.5	2
YBX3 400-6	280	544.4	990	95.3	0.82	1.3	6.5	2
YBX3 400-6	315	612.5	990	95.3	0.82	1.3	6.5	2
YBX3 400-6	355	690.2	990	95.3	0.82	1.3	6.5	2
YBX3 400-6	400	776.1	990	95.5	0.82	1.3	6.5	2
YBX3 400-6	450	873.1	990	95.5	0.82	1.3	6.5	2
YBX3 400-6	500	955.4	990	95.8	0.83	1.3	6.5	2
YBX3 400-6	560	1070.1	990	95.8	0.83	1.3	6.5	2
YBX3 450-6	500	955.4	990	95.8	0.83	1.3	6.5	2
YBX3 450-6	560	1070.1	990	95.8	0.83	1.3	6.5	2
YBX3 450-6	630	1201.3	990	96	0.83	1.3	6.5	2
YBX3 450-6	710	1353.9	990	96	0.83	1.3	6.5	2

YBX3高效率隔爆型三相异步电动机性能参数 (380V)

型号 Type	功率 kW	电流 A	转速 r/min	效率 %	功率因数 COS ϕ	堵转转矩/ 额定转矩	堵转电流/ 额定电流	最大转矩 /额定转 矩
YBX3 450-6	800	1525.5	990	96	0.83	1.3	6.5	2
YBX3 450-6	900	1716.2	990	96	0.83	1.3	6.5	2
YBX3 500-6	1000	1882.2	990	96.1	0.84	1.1	6.5	2
YBX3 500-6	1120	2108.1	990	96.1	0.84	1.1	6.5	2
YBX3 500-6	1250	2325.1	990	96.1	0.85	1.1	6.5	2
YBX3 500-6	1400	2604.1	990	96.1	0.85	1.1	6.5	2
YBX3 400-8	220	453.5	745	94.5	0.78	1.2	6.5	2
YBX3 400-8	250	515.3	745	94.5	0.78	1.2	6.5	2
YBX3 400-8	280	577.2	745	94.5	0.78	1.2	6.5	2
YBX3 400-8	315	649.3	745	94.5	0.78	1.2	6.5	2
YBX3 400-8	355	728.7	745	94.9	0.78	1.2	6.5	2
YBX3 400-8	400	800.5	745	94.9	0.8	1.2	6.5	2
YBX3 400-8	450	896.8	745	95.3	0.8	1.2	6.5	2
YBX3 450-8	400	800.5	740	94.9	0.8	1.2	6.5	2
YBX3 450-8	450	896.8	740	95.3	0.8	1.2	6.5	2
YBX3 450-8	500	984.1	740	95.3	0.81	1.2	6.5	2
YBX3 450-8	560	1098.8	740	95.6	0.81	1.2	6.5	2
YBX3 450-8	630	1236.1	740	95.6	0.81	1.2	6.5	2
YBX3 450-8	710	1393.1	740	95.6	0.81	1.2	6.5	2
YBX3 500-8	800	1547.3	740	95.8	0.82	1	6	1.8
YBX3 500-8	900	1740.7	740	95.8	0.82	1	6	1.8
YBX3 500-8	1000	1934.1	740	95.8	0.82	1	6	1.8
YBX3 500-8	1120	2166.2	740	95.8	0.82	1	6	1.8
YBX3 400-10	185	429.0	595	93.6	0.7	1	6	2
YBX3 400-10	200	463.8	595	93.6	0.7	1	6	2
YBX3 400-10	220	494.9	595	93.8	0.72	1	6	2
YBX3 400-10	250	561.2	595	94	0.72	1	6	2
YBX3 400-10	280	628.6	595	94	0.72	1	6	2
YBX3 400-10	315	704.2	595	94.4	0.72	1	6	2
YBX3 400-10	355	761.8	595	94.4	0.75	1	6	2
YBX3 450-10	315	704.2	595	94.4	0.72	1	6	2
YBX3 450-10	355	761.8	595	94.4	0.75	1	6	2
YBX3 450-10	400	855.7	595	94.7	0.75	1	6	2
YBX3 450-10	450	962.7	595	94.7	0.75	1	6	2
YBX3 450-10	500	1066.2	595	95	0.75	1	6	2
YBX3 450-10	560	1194.2	595	95	0.75	1	6	2
YBX3 500-10	630	1325.8	595	95	0.76	0.8	5.5	1.8
YBX3 500-10	710	1489.4	595	95.3	0.76	0.8	5.5	1.8
YBX3 500-10	800	1678.2	595	95.3	0.76	0.8	5.5	1.8
YBX3 500-10	900	1888.0	595	95.3	0.76	0.8	5.5	1.8

YBX3高效率隔爆型三相异步电动机性能参数 (380V)

型号 Type	功率 kW	电流 A	转速 r/min	效率 %	功率因数 COS ϕ	堵转转矩/ 额定转矩	堵转电流/ 额定电流	最大转矩 /额定转 矩
YBX3 400-12	160	402.2	495	93	0.65	1	5.5	1.8
YBX3 400-12	185	465.0	495	93	0.65	1	5.5	1.8
YBX3 400-12	200	501.6	495	93.2	0.65	1	5.5	1.8
YBX3 400-12	220	550.6	495	93.4	0.65	1	5.5	1.8
YBX3 400-12	250	625.7	495	93.4	0.65	1	5.5	1.8
YBX3 400-12	280	667.0	495	93.8	0.68	1	5.5	1.8
YBX3 450-12	315	750.4	495	93.8	0.68	1	5.5	1.8
YBX3 450-12	355	842.0	495	94.2	0.68	1	5.5	1.8
YBX3 450-12	400	948.8	495	94.2	0.68	1	5.5	1.8
YBX3 450-12	450	1067.4	495	94.2	0.68	1	5.5	1.8
YBX3 500-12	500	1152.1	495	94.2	0.7	0.8	5.5	1.8
YBX3 500-12	560	1287.6	495	94.4	0.7	0.8	5.5	1.8
YBX3 500-12	630	1448.6	495	94.4	0.7	0.8	5.5	1.8
YBX3 500-12	710	1632.5	495	94.4	0.7	0.8	5.5	1.8
YBX3 400-14	160	416.7	425	92.6	0.63	1	5	1.8
YBX3 400-14	185	481.3	425	92.7	0.63	1	5	1.8
YBX3 400-14	200	518.7	425	93	0.63	1	5	1.8
YBX3 400-14	220	570.5	425	93	0.63	1	5	1.8
YBX3 400-14	250	627.0	425	93.2	0.65	1	5	1.8
YBX3 450-14	280	702.3	425	93.2	0.65	1	5	1.8
YBX3 450-14	315	787.5	425	93.5	0.65	1	5	1.8
YBX3 450-14	355	887.5	425	93.5	0.65	1	5	1.8
YBX3 450-14	400	1000.0	425	93.5	0.65	1	5	1.8
YBX3 500-14	450	1090.3	425	93.6	0.67	0.8	5	1.8
YBX3 500-14	500	1211.4	425	93.6	0.67	0.8	5	1.8
YBX3 500-14	560	1353.9	425	93.8	0.67	0.8	5	1.8
YBX3 500-14	630	1523.1	425	93.8	0.67	0.8	5	1.8
YBX3 400-16	132	362.9	370	92.1	0.6	1	5	1.8
YBX3 400-16	160	439.9	370	92.1	0.6	1	5	1.8
YBX3 400-16	185	508.7	370	92.1	0.6	1	5	1.8
YBX3 400-16	200	548.7	370	92.3	0.6	1	5	1.8
YBX3 450-16	220	582.9	370	92.5	0.62	1	5	1.8
YBX3 450-16	250	662.3	370	92.5	0.62	1	5	1.8
YBX3 450-16	280	737.8	370	93	0.62	1	5	1.8
YBX3 450-16	315	830.1	370	93	0.62	1	5	1.8
YBX3 500-16	355	904.3	370	93.2	0.64	0.8	5	1.8
YBX3 500-16	400	1018.9	370	93.2	0.64	0.8	5	1.8
YBX3 500-16	450	1143.8	370	93.4	0.64	0.8	5	1.8
YBX3 500-16	500	1270.9	370	93.4	0.64	0.8	5	1.8